



MODELS AVAILABLE


1120-013S 1" Aluminum AODD Pump

SPECIFICATIONS

Max. free flow	45 g/m (1704 l/m)
Air pressure range	20-100 psi (3 - 7 bar)
Solids in suspension	1/4" (6 mm)
Air inlet	1/2" NPT(F)
Fluid inlet port	1" NPT(F)
Fluid outlet port	1" NPT(F)
Wetted materials	Aluminum, Polypropylene, and Buna-N™
Recommended Fluids	Light viscosity fluids synthetic, mineral oils, Used Oil, and Anti-freeze (Glycol)
Recommended Applications	Fluid dispensing, transfer, evacuation, and distribution systems

SERVICE BULLETINS & ACCESSORIES

Service Bulletin	SB1096
Accessories pg.	53

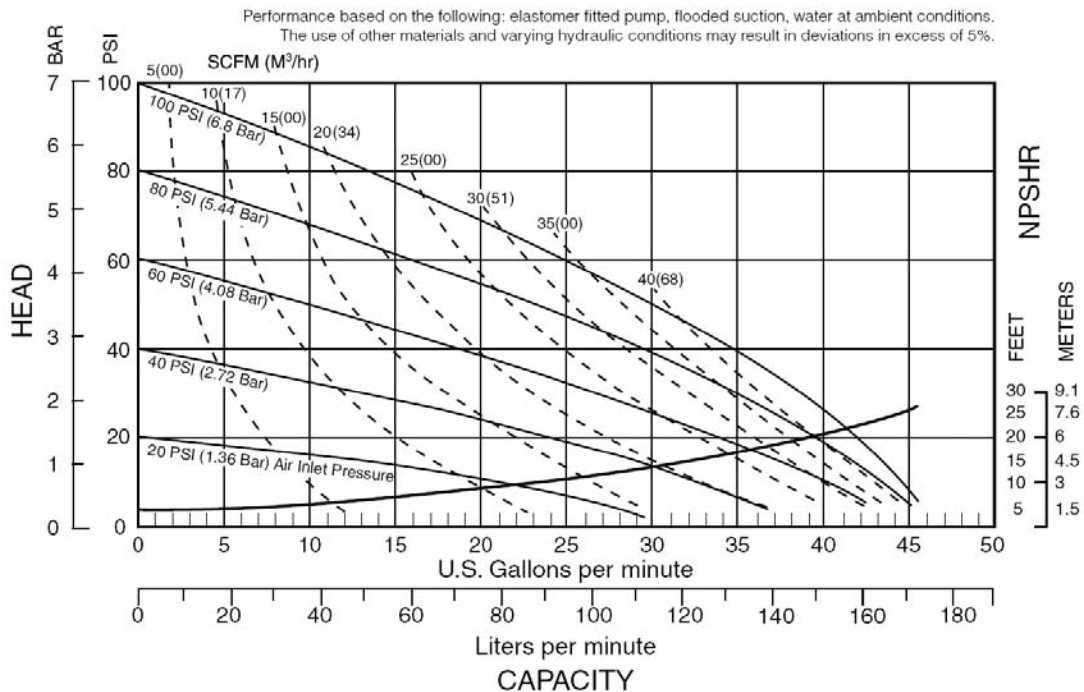

~ NOTE~ Pump packages include all hoses and adapters required for connecting an oil pump to the air supply, and oil dispense line.
Balcrank does not provide wall mounting hardware (nuts, bolts, and anchors) for lube packages.