


AODD | Conventional 1" UL Aluminum

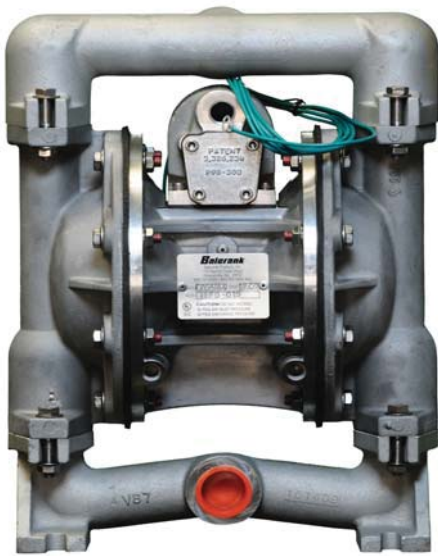

MODELS AVAILABLE

1120-015S 1" UL Aluminum AODD Pump

SPECIFICATIONS

Max. free flow	45 gal/m (170 l/m)
Air pressure range	45 -100 psi (3 - 7 bar)
Solids in suspension	1/4" (6 mm)
Air inlet	1/2" NPT(F)
Fluid inlet port	1" NPT(F)
Fluid outlet port	1" NPT(F)
Wetted materials	Aluminum and Buna-N™
Recommended Fluids	Light viscosity fluids synthetic, mineral oils, Used Oil, and Diesel Fuel
Recommended Applications	Fluid dispensing, transfer, evacuation, and distribution systems

SERVICE BULLETINS & ACCESSORIES

Service Bulletin	SB1113
Accessories pg.	53

