# Model 518 Series 7<sup>1</sup>/<sub>2</sub> Gallon AST Spill Container

ULC

## SPECIFICATION SHEET

Tank top spill containers are designed to contain small spills that occur at the fill point on aboveground storage tanks.

#### Features

- 7<sup>1</sup>/<sub>2</sub> gallon (28.39 liters) capacity
- · Hinged cover lockable with a padlock
- · Space saving offset design
- 518 has female threaded offset connection
- 518CC has female threaded centered connection
- 518M has male threaded offset connection

#### **Construction Details**

- · 12 gauge spun steel, powder coated white body
- 14 gauge steel, powder coated white cover
- Brass drain valve
- Viton<sup>®</sup> drain o-ring


### **Certifications & Listings**

- Florida DEP EQ 345
- Meets the new and revised requirements for CAN-ULC-S663-11 (effective September 25, 2015)

| I.D. Number   | Α   | В | С | D  | Е | F | G      | Н     | I    | J     |
|---------------|-----|---|---|----|---|---|--------|-------|------|-------|
| 5180100 AC    | 7.5 | F | 0 | 4″ | Υ | Ν | 15.87″ | 19.3″ | 26.0 | 15.09 |
| 518CC-0100 AC | 7.5 | F | С | 4″ | Y | Ν | 15.87″ | 19.3″ | 26.0 | 15.09 |
| 518M0100 AC   | 7.5 | М | 0 | 4″ | Y | N | 17.2″  | 19.3″ | 26.0 | 15.09 |
| 518M0200 AC   | 7.5 | М | 0 | 2″ | Y | Ν | 16.4″  | 19.3″ | 20.0 | 15.09 |

#### **SPECIFICATION OPTIONS:**

- A—Capacity: Gallons
- **B**—Mounting Connection: Male (M), Female (F) **C**—Mounting Location: Center (C)
- D—Size: NPT threads
- E-Drain: Yes/No
- F-Screen: Yes/No
- G—Height: (inches) H—Width: (inches)
- I—Shipping weight: (lbs)
- J—Body diameter

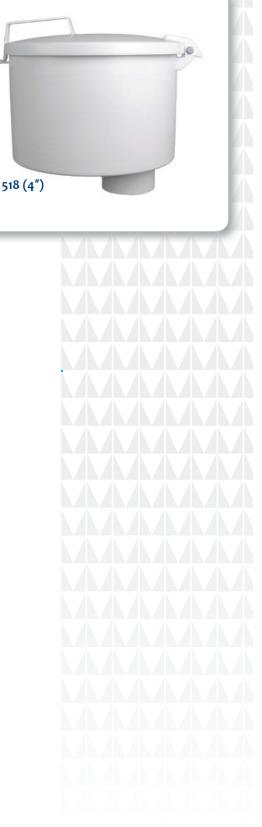



570 E. 7th Street, P.O. Box 238 | Dubuque, IA 52004-0238 t. 563.583.5701 | 800.553.4840 | f. 563.583.5028 www.morbros.com