

SUBMITTAL DATA SHEET

Sump, Sewage, & Effluent Pumps
DuraMAC™ | Guardian


5000PVSPBU Sump Pump Backup



See Pumps & Accessories
Price List for Limited
Warranty details.

This battery backup system is designed to provide temporary back-up during power failures or malfunctions with your primary electric sump pump. It works with 12 volt, deep cycle marine battery, which is not included.

Sump Pump Performance Curve

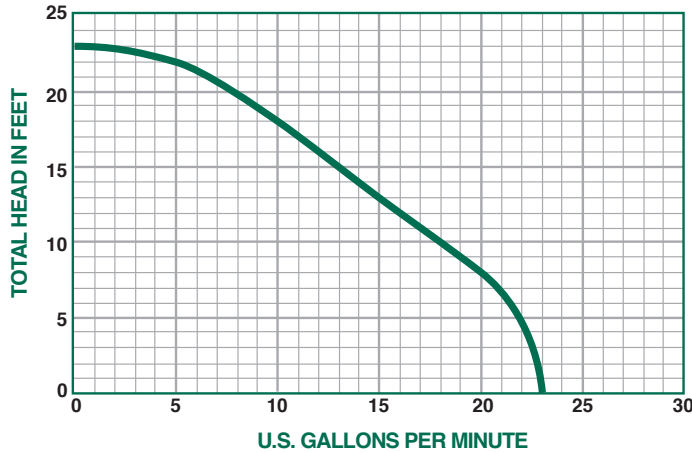

PERFORMANCE CHART

Model	Gallons per Minute in Feet				
	0	5	10	15	20
5000PVSPBU	23	22	18	13	8

SUBMERSIBLE THERMOPLASTIC SUMP PUMP - 1 1/2" DISCHARGE

Model	Volts	Hz	Amps	Construction	Discharge Size	Cord Length	Solids Handling	Phase
5000PVSPBU	12V DC	60	12	Thermoplastic	1 1/4" or 1 1/2"	10'	1/8	1

SUBMITTAL INFORMATION

- 5000PVSPBU 12V DC Thermoplastic sump pump
- Vertical switch and 10' Cord
- 1 1/4" or 1 1/2" Discharge (pump discharge 1 1/4", w/check valve 1 1/2")
- Alarm/Control unit with fuse and mute feature
- Thermoplastic battery box

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
P.O. Box 508
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737
Fax: 1-800-832-9296
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: