

# SUBMITTAL DATA SHEET

Sump, Sewage, & Effluent Pumps  
DuraMAC™ | Guardian


## 5050CVPD Sump Pump



See Pumps & Accessories  
Price List for Limited  
Warranty details.


This pump is designed for use in sump basins 12" or larger. It has a cast iron base construction and will handle liquids up to 180°F.

### Sump Pump Performance Curve

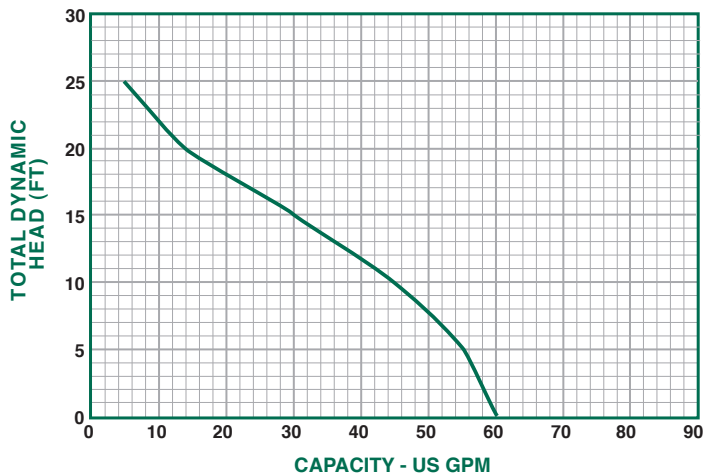

#### PERFORMANCE CHART

Model	Gallons per Minute in Feet					
	0	5	10	15	20	25
5050CVPD	60	55	45	30	12	5

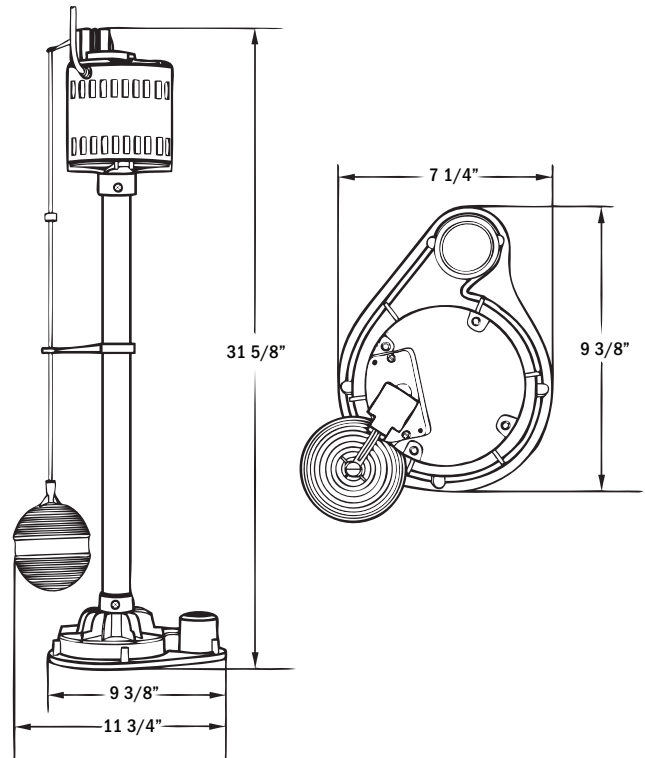

#### SUBMERSIBLE CAST IRON PEDESTAL SUMP PUMP - 1 1/2" DISCHARGE

Model	HP	Amps	Base Material	Discharge Size	Column Material	Impeller Material	Cord Length
5050CVPD	1/2	3.06	Cast Iron	1 1/2"	Stainless Steel	Stainless Steel	10'

#### SUBMITTAL INFORMATION

- Fully adjustable automatic switch
- Metal switch arm for strength and durability
- 1 1/2" discharge for high capacity pumping
- Non-corrosive stainless steel drive shaft, impeller & float ball



**NO-LEAD:** The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.  
P.O. Box 508  
Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737  
Fax: 1-800-832-9296  
Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com  
www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: