
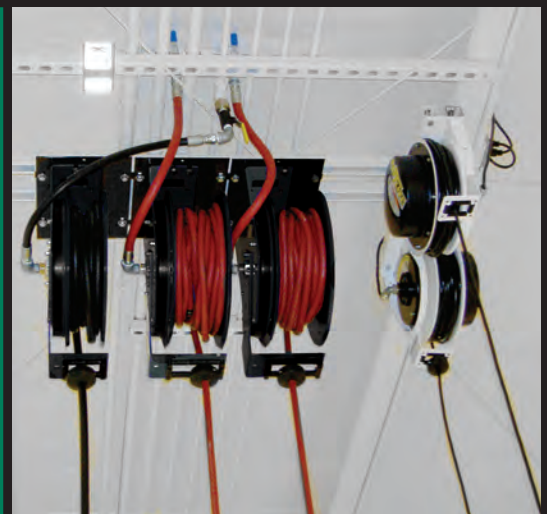


# **Balcrank**

## Fluid Dispensing Systems

Automotive | Commercial | Industrial

### Hose Reels

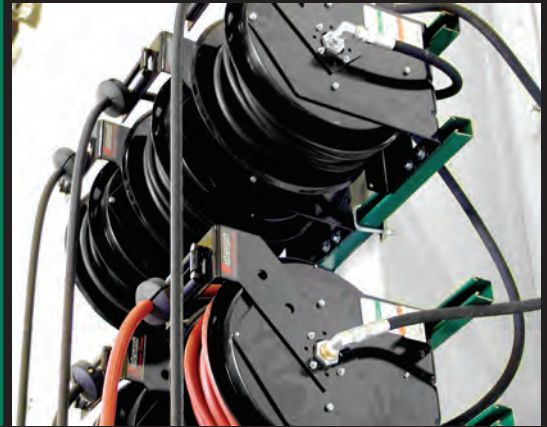

## Hose Reels Product Selection Matrix

MAX. HOSE	CONSTRUCTION	RECOMMENDED MARKETS	RECOMMENDED APPLICATIONS	MOUNTING
<b>EVOLUTION</b>				
50' x 1/2"	Composite spool Steel pedestal Dual ball-bearings	Grease Small to medium dealerships Tire shops Transmission shops	Air/Water - low pressure Oil - medium pressure Grease - high pressure Enclosed models	Ceiling, floor, wall, truck, tank
<b>CLASSIC</b>				
50' x 1/2" 30' x 3/4"	All steel spool and Pedestal	Grease Auto dealerships Tire shops Transmission Shops	Air/Water - low pressure Diesel - low pressure Oil - medium pressure DEF - medium pressure Grease - high pressure Enclosed models	Ceiling, floor, wall, tank
<b>PREMIUM</b>				
60' x 1/2"	All steel spool and Pedestal Double arm Dual ball-bearings	Truck stops Municipalities Railroad Mining Lube trucks	Air/Water - low pressure Oil - medium pressure Grease - high pressure	Ceiling, floor, wall, truck, tank
<b>EXTENDED VOLUME (EV)</b>				
50' x 3/4" 65' x 3/8" 65' x 1/2"	All steel spool and Pedestal Heavy duty High capacity Double arm Dual ball-bearings	Truck stops Municipalities Railroad Mining Lube trucks	Air/Water - low pressure DEF - low pressure Diesel - low pressure Oil - medium pressure Grease - high pressure	Ceiling, floor, wall, truck, tank
<b>EXTENDED VOLUME EXTRA (EVX)</b>				
50' x 1" 75' x 3/4" 100' x 1/2"	All steel spool and Pedestal Heavy duty High capacity Double arm Dual ball-bearings	Truck stops Municipalities Railroad Mining Lube trucks	Air/Water - low pressure Diesel - low pressure Evacuation - low pressure Oil - medium pressure	Floor, truck, tank



EVOLUTION



CLASSIC



PREMIUM



EXTENDED VOLUME (EV)



EXTENDED VOLUME EXTRA (EVX)

## Hose Reels Evolution




**Air & Water  
Oil  
Grease  
Anti-freeze**

### Evolution Hose Reel: an Evolution in Design and Performance

Lightweight but extremely rugged: steel pedestal and arm and dual ball-bearings. The Evolution is a solid performer. The Evolution combines design, performance and reliability with the right features and benefits for today's customers. All Evolution series reels have a narrow and lightweight design; includes hose, hose stop and a 2.5' connecting hose.



MODELS AVAILABLE	DESCRIPTION	REPLACEMENT HOSE
Air & water low pressure 300 psi (21 bar) for delivery of air, water, windshield wash fluid, and anti-freeze		
<b>2140-021</b>	Bare reel - up to 50' Hose	
<b>2140-007</b>	30' x 3/8" ID hose	8136-030
<b>2140-008</b>	50' x 3/8" ID hose	8136-050
<b>2140-010</b>	30' x 1/2" ID hose	8141-030
<b>2140-011</b>	50' x 1/2" ID hose	8141-050
Oil medium pressure 2,750 psi (190 bar) for delivery of lubricants		
<b>2140-002</b>	Bare reel - up to 50' Hose	
<b>2140-013</b>	30' x 1/2" ID hose	8241-030
<b>2140-014</b>	50' x 1/2" ID hose	8241-050
Grease high pressure 5,000 psi (345 bar) for delivery of grease		
<b>2140-005</b>	Bare reel - up to 50' Hose	
<b>2140-019</b>	30' x 3/8" ID hose	8332-030
<b>2140-020</b>	50' x 3/8" ID hose	8332-050

TECHNICAL DATA	
Low & medium pressure reels	
Fluid inlet port	1/2" NPT(F) swivel
Fluid outlet port	1/2" NPT(F) swivel
Hose outlet thread	1/4" NPT(M) for 3/8" ID Hoses
	1/2" NPT(M) for 1/2" ID Hoses
Wetted materials	Low Pressure - brass, Acetal & Buna-N
	Medium pressure - Steel (plated) & Buna-N
High Pressure Reels	
Fluid inlet port	3/8" NPT(F) swivel
Fluid outlet port	3/8" NPT(F) swivel
Hose outlet thread	1/4" NPT(M) for 3/8" ID Hoses
Wetted materials	Nickel Plated Steel, Hardened steel and Polyurethane
Service bulletin	SB2025

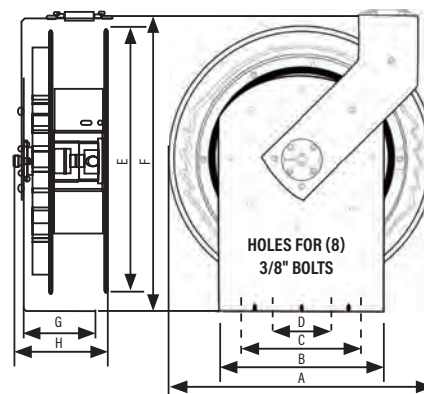

DIMENSIONS INCHES							
A	B	C	D	E	F	G	H
18"	11"	9 1/2"	4"	18"	20"	5"	6 1/2"

## Hose Reels Classic

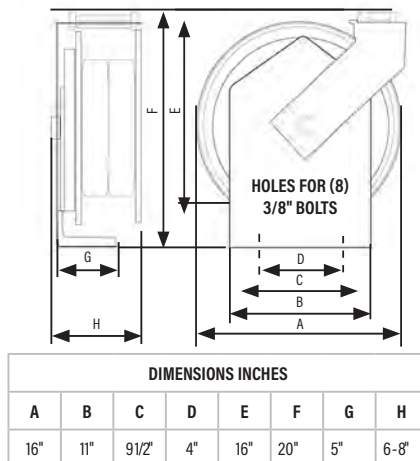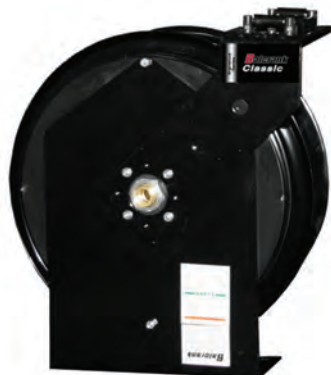

**Air & Water  
Oil  
Grease  
Diesel  
Anti-freeze  
Windshield-wash  
DEF**

**The Classic Hose Reel has been the standard of reliability for over a decade.**

This solid, all steel hose reel is preferred for general duty, automotive dealerships, and service garages. Proven performance and reliable operation; all Classic series reels includes hose, hose stop and a 2.5' connecting hose.

STANDARD color	Special color 2-week lead-time					Custom color 6-week lead time	
Semi-gloss Black	Wt	Gr	Bl	Rd	Silver	Yl	based on specifications supplied by the customer

MODELS AVAILABLE	DESCRIPTION	REPLACEMENT HOSE
Air & Water Low Pressure 300 psi (21 bar) for delivery of air, water, anti-freeze and windshield wash***		
<b>2120-016</b>	Bare reel - up to 30' Hose	--
<b>2120-017</b>	Bare reel - up to 50' Hose	--
<b>2120-014</b>	30' x 3/8" ID hose	8136-030
<b>2120-005</b>	40' x 3/8" ID hose	8136-040
<b>2120-015</b>	50' x 3/8" ID hose	8136-050
<b>2120-021*</b>	30' x 3/8" ID hose. No arm	8141-030
<b>2120-020</b>	50' x 1/2" ID hose	8141-050
<b>2120-025**</b>	30' x 3/8" ID hose-Nitrogen	8135-030
<b>2120-026**</b>	50' x 3/8" ID hose-Nitrogen	8135-050
Oil medium pressure 2,750 psi (190 bar) for delivery of lubricants		
<b>2120-016</b>	Bare reel - up to 30' Hose	--
<b>2120-017</b>	Bare reel - up to 50' Hose	--
<b>2120-011</b>	30' x 1/2" ID hose	8241-030
<b>2120-012</b>	40' x 1/2" ID hose	8241-040
<b>2120-013</b>	50' x 1/2" ID hose	8241-050
<b>2120-022*</b>	16' x 1/2" ID hose. No arm	8241-016
Grease High pressure 5,000 psi (345 bar) for delivery of grease.		
<b>2120-018</b>	Bare reel - up to 30' Hose	--
<b>2120-019</b>	Bare reel - up to 50' Hose	--
<b>2120-004</b>	40' x 3/8" ID hose	8331-040
<b>2120-007</b>	50' x 3/8" ID hose	8331-050
<b>2120-001</b>	30' x 1/4" ID hose	8321-030
<b>2120-002</b>	40' x 1/4" ID hose	8321-040
<b>2120-006</b>	50' x 1/4" ID hose	8321-050
Diesel Exhaust Fluid Low pressure 150 psi (10 bar) for delivery of DEF - Painted blue		
<b>2400-006</b>	Bare reel - up to 30' Hose	--
<b>2400-007</b>	16' x 3/4" ID hose	8569-016
<b>2400-008</b>	20' x 3/4" ID hose	8569-020
<b>2400-009</b>	30' x 3/4" ID hose	8569-030
Diesel Low pressure 50 psi (3 bar) for delivery of diesel - Painted green		
<b>2120-027</b>	Bare reel - up to 30' Hose	--
<b>2120-024</b>	30' x 3/4" ID hose	8466-030

\* Classic reel less outlet arm for workbench mounting

\*\* Nitrogen green hose, maximum working pressure 300 psi (20 bar)

For specific windshield wash applications contact Balcrank Engineering for recommendations.

### TECHNICAL DATA

#### Low & Medium Pressure Reels

Fluid inlet port	1/2" NPT(F) swivel
Fluid outlet port	1/2" NPT(F) swivel
Hose outlet thread	1/4" NPT(M) for 3/8" ID Hoses 1/2" NPT(M) for 1/2" ID Hoses
Wetted materials	Plated steel, Brass, bronze and Buna-N

#### High Pressure Reels

Fluid inlet port	1/4" NPT(F) swivel
Fluid outlet port	1/4" NPT(F) swivel
Hose outlet thread	1/4" NPT(M) for 1/4" ID Hoses 1/4" NPT(M) for 3/8" ID Hoses
Wetted materials	Plated steel, hardened steel and Buna-N

#### Low Pressure DEF Reels\*

Fluid inlet port	3/4" BSPP(F) swivel
Fluid outlet port	3/4" BSPP(M) swivel
Hose outlet thread	3/4" BSPP(M) for 3/4" ID Hoses
Wetted materials	Stainless steel, Viton®

#### Low Pressure Diesel Reels\*\*

Fluid inlet port	3/4" NPT(F) swivel
Fluid outlet port	3/4" NPT(F) swivel
Hose outlet thread	3/4" NPT(M) for 3/4" ID Hoses
Wetted materials	Plated steel and Buna-N

Service Bulletin	SB2002 SB2002-A (No arm reels) SB2023 (DEF reels) SB2018 (Diesel reels)
------------------	--

\* DEF reels are available in powder coat blue only

\*\* Diesel reels are available in powder coat green only



## Hose Reels Premium



**Air & Water  
Oil  
Grease  
Anti-freeze  
Windshield-wash**

### Premium Hose Reel for the toughest shop environments

Today's heavy-duty hose reel market demands an innovative use of components that provide long life, improved serviceability and superior structural design. Our Premium reel incorporates advanced design features that ensures long life in the toughest environments while reducing overall weight. All Premium series reels have a narrow design; includes hose, hose stop and a 2.5' connecting hose.

MODELS AVAILABLE	DESCRIPTION	REPLACEMENT HOSE
Air & Water Low Pressure 300 psi (21 bar) for delivery of air, water, anti-freeze and windshield wash**		
<b>2111-048</b>	Bare reel - up to 50' Hose	-
<b>2111-049</b>	Bare reel - up to 60' Hose	-
<b>2111-031</b>	30' x 3/8" ID hose	8136-030
<b>2111-032</b>	40' x 3/8" ID hose	8136-040
<b>2111-033</b>	50' x 3/8" ID hose	8136-050
<b>2111-034</b>	60' x 3/8" ID hose (50' + 10')*	8136-060
<b>2111-035</b>	40' x 1/2" ID hose	8141-040
<b>2111-036</b>	50' x 1/2" ID hose	8141-050
<b>2111-037</b>	60' x 1/2" ID hose (50' + 10')*	8141-060
Oil Medium Pressure 2,750 psi (190 bar) for delivery of lubricants		
<b>2111-027</b>	Bare reel - up to 50' Hose	-
<b>2111-028</b>	Bare reel - up to 60' Hose	--
<b>2111-038</b>	30' x 1/2" ID hose	8241-030
<b>2111-039</b>	40' x 1/2" ID hose	8241-040
<b>2111-040</b>	50' x 1/2" ID hose	8241-050
<b>2111-041</b>	60' x 1/2" ID hose (50' + 10')*	8241-060
Grease High-pressure 5,000 psi (345 bar) for delivery of grease.		
<b>2111-029</b>	Bare reel - up to 50' Hose	--
<b>2111-030</b>	Bare reel - up to 60' Hose	--
<b>2111-045</b>	40' x 3/8" ID hose	8332-040
<b>2111-046</b>	50' x 3/8" ID hose	8332-050
<b>2111-047</b>	60' x 3/8" ID hose (50' + 10')*	8332-060
<b>2111-042</b>	40' x 1/4" ID hose	8323-040
<b>2111-043</b>	50' x 1/4" ID hose	8323-050
<b>2111-044</b>	60' x 1/4" ID hose (50' + 10')*	8323-060

\* 50' on spool with 10' hanging

\*\* For specific windshield wash applications contact Balcrank Engineering for recommendations.


### TECHNICAL DATA

#### Low & Medium Pressure Reels

Fluid inlet port	1/2" NPT(F) swivel
Fluid outlet port	1/2" NPT(F) swivel
Hose outlet thread	1/2" NPT(M) for 3/8" ID Hoses 1/2" NPT(M) for 1/2" ID Hoses
Wetted Materials	Low pressure - Brass, Acetal & Buna-N Med. pressure - Steel (plated) & Buna-N

#### High Pressure Reels

Fluid inlet port	3/8" NPT(F) swivel
Fluid outlet port	3/8" NPT(F) swivel
Hose outlet thread	1/4" NPT(M) for 1/4" ID Hoses 1/4" NPT(M) for 3/8" ID Hoses
Wetted Materials	Nickel plated steel, hardened steel and Polyethylene
Wetted Materials	Hardened steel and Polyurethane
Service Bulletin	SB2027

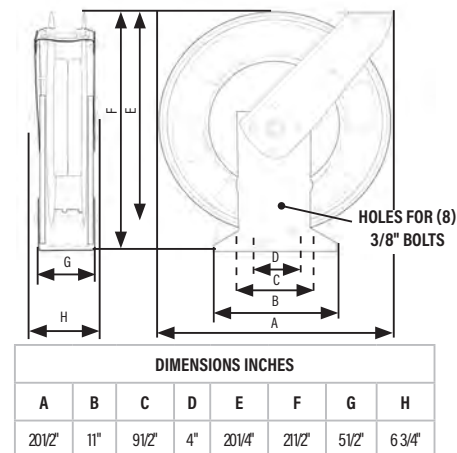

## Hose Reels Extended Volume (EV)

**Air & Water  
Anti-freeze  
Oil  
Grease  
Diesel  
DEF**


The Extended Volume, EV Series hose reels are designed for high volume heavy-duty applications where large hose diameters are required for increased flow. The EV reels will accommodate up to 50' of 3/4" ID hose or 65' of 1/2" ID hose. Perfect for heavy-duty fleet, construction, mining and industrial applications. All EV series reels include hose, hose stop and a 2.5' connecting hose.



MODELS AVAILABLE	DESCRIPTION	REPLACEMENT HOSE
Air & Water Low Pressure 300 psi (21 bar) for delivery of air, water and anti-freeze		
<b>2310-033</b>	Bare reel - up to 65' x 1/2" or 50' x 3/4"	-
<b>2310-027</b>	65' x 1/2" ID hose	8141-065
<b>2310-028</b>	50' x 3/4" ID hose	8161-050
Oil Medium Pressure for delivery of lubricants		
<b>2310-033</b>	Bare reel - up to 65' x 1/2" or 50' x 3/4"	-
<b>2310-031</b>	50' x 3/4" ID hose 1,950 psi (135 bar)	8264-050
<b>2310-029</b>	65' x 1/2" ID hose 2,750 psi (190 bar)	8250-065
Grease High Pressure 5,000 psi (345 bar) for delivery of grease		
<b>2310-046</b>	65' x 3/8" ID hose	8332-065
Diesel Low Pressure 50 psi (3 bar) for delivery of diesel		
<b>2310-033</b>	Bare reel - up to 65' x 1/2" or 50' x 3/4"	-
<b>2310-032</b>	50' x 3/4" ID hose	8466-050
Diesel Exhaust Fluid Low Pressure 150 psi (10 bar) for delivery of diesel exhaust fluid		
<b>2400-010</b>	Bare reel - up to 65' x 1/2" or 50' x 3/4"	-
<b>2400-011</b>	50' x 3/4" ID hose	8569-050

For specific windshield wash applications contact Balcrank Engineering for recommendations.

TECHNICAL DATA	
Diesel, Low & Medium Pressure Reels	
Fluid inlet port	3/4" NPT(F) swivel
Fluid outlet port	3/4" NPT(F) swivel
Hose outlet thread	1/2" NPT(M) for 1/2" ID Hoses 3/4" NPT(M) for 3/4" ID Hoses
Wetted Materials	Nickel plated steel and Buna-N
Service Bulletin	SB2028
Low Pressure DEF Reels	
Fluid inlet port	3/4" BSPP(F) swivel
Fluid outlet port	3/4" BSPP(F) swivel
Hose outlet thread	3/4" BSPP (M) for 3/4" ID Hoses
Wetted Materials	Stainless Steel, Polypropylene, & Viton <sup>®</sup>
Service Bulletin	SB2028
High Pressure Reels	
Fluid inlet port	3/8" NPT(F) swivel
Fluid outlet port	3/8" NPT(F) swivel
Hose outlet thread	3/8" NPT(M)
Wetted Materials	Nickel Plated Steel, Hardened steel and Polyurethane
Service Bulletin	SB2028

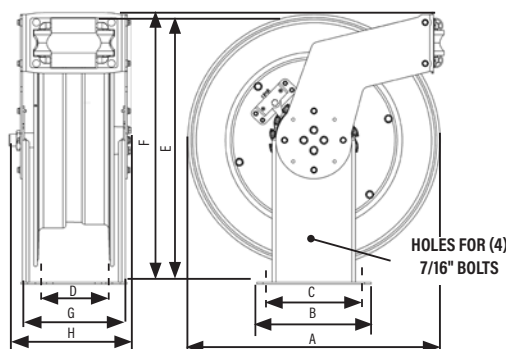

DIMENSIONS INCHES							
A	B	C	D	E	F	G	H
22"	85/8"	5"	51/8"	22"	23/2"	9"	91/4"

## Hose Reels EVX Extended Volume Extra




**Air & Water  
Oil  
Diesel  
Anti-freeze  
Used Oil**

The Extended Volume, EVX Series hose reels are designed for high volume heavy-duty applications where large hose diameters are required for increased flow. The EVX reels will accommodate up to 50' of 1" ID hose or 100' of 1/2" ID hose. Perfect for heavy-duty fleet, construction, mining and industrial applications.

MODELS AVAILABLE	DESCRIPTION	REPLACEMENT HOSE
Air & Water Low Pressure 300 psi (21 bar) for delivery of air, water and anti-freeze		
<b>2310-034</b>	Bare reel, 50' x 1" ID hose or 75' x 1/2" ID hose	-
<b>2310-035</b>	Bare reel, 75' x 3/4" ID hose or 100' x 1/2" ID hose	-
<b>2310-036</b>	75' x 1/2" ID hose	8141-075
<b>2310-037</b>	100' x 1/2" ID hose	8141-100
<b>2310-038</b>	75' x 3/4" ID hose	8161-075
<b>2310-039</b>	50' x 1" ID hose	8181-050
Oil Medium Pressure 1,525 psi (105 bar) & 2,320 (160 bar) for delivery of lubricants		
<b>2310-035</b>	Bare reel, 75' x 3/4" ID hose or 100' x 1/2" ID hose	-
<b>2310-041</b>	75' x 3/4" ID hose 1,525 psi	8264-075
<b>2310-040</b>	100' x 1/2" ID hose 2,320 psi	8250-100
Diesel & Evacuation Low Pressure 50 psi (3 bar) for delivery of diesel fuel and used oil evacuation*		
<b>2310-034</b>	Bare reel, 50' x 1" ID hose or 75' x 1/2" ID hose	-
<b>2310-043</b>	50' x 1" ID hose Diesel	8481-050
<b>2310-042</b>	50' x 1" ID hose Evacuation	8181-050

\* Verify they system design supports the use of an evacuation reel.  
For specific windshield wash applications contact Balcrank Engineering for recommendations.

TECHNICAL DATA	
Low & Medium Pressure Reels	
Fluid inlet port	1" NPT(F) swivel
Fluid outlet port	1" NPT(F) swivel
Hose outlet thread	1/2" NPT(M) for 1/2" ID Hoses
	3/4" NPT(M) for 3/4" ID Hoses
	1" NPT(M) for 1" ID Hoses
Wetted Materials	Nickel plated steel and Buna-N
Service Bulletin	SB2029

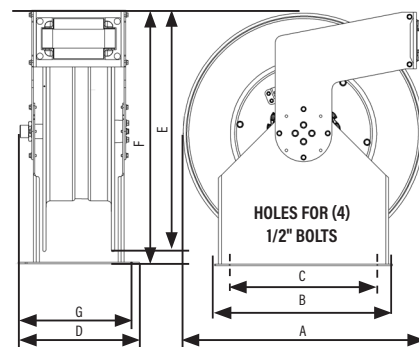

DIMENSIONS INCHES							
A	B	C	D	E	F	D	G
25"	18 1/2"	15"	5 1/8"	25"	26 1/2"	12 5/8"	12 3/8"

## Hose Reels Enclosed Hose Reels

All metal enclosed cabinet hose reels are designed to improve the appearance of any shop. Standard color is black and six special colors are available to match workbenches, and automotive lifts.

### CHOOSE YOUR REEL

MODELS AVAILABLE	DESCRIPTION
Air & Water Low Pressure 300 psi (21 bar) for delivery of air, water and anti-freeze	
2251-338	30' x 3/8" ID hose
2251-538	50' x 3/8" ID hose
2251-312	30' x 1/2" ID hose
2251-512	50' x 1/2" ID hose
Oil Medium Pressure 3,000 psi (207 bar) for delivery of lubricants	
2252-312	30' x 1/2" ID hose
2252-512	50' x 1/2" ID hose
Grease High-pressure 4,000 (276 bar) for delivery of grease	
2253-314	30' x 1/4" ID hose
2253-538	50' x 3/8" ID hose



### ADD A LIGHT OR ELECTRIC REEL

MODELS AVAILABLE	DESCRIPTION
2254-518	Light Cord Reel 50' x 18 gauge
2254-316	Electric Cord Reel 30' x 10 amps, 3 outlet



### CHOOSE YOUR SIDE ENCLOSURE

#### Order 1 side enclosure kit per reel

Side enclosure kits include: 2 side panels, 1 roller outlet assembly, 1 quick mounting channel, and hardware

MODELS AVAILABLE	DESCRIPTION
2250-011	kit, side enclosure black semi-gloss
2250-012	kit, side enclosure white
2250-013	kit, side enclosure green
2250-014	kit, side enclosure blue
2250-015	kit, side enclosure red
2250-016	kit, side enclosure silver
2250-017	kit, side enclosure yellow




### CHOOSE YOUR END PANEL KIT

#### Order 1 end panel kit per reel bank

End panel kits include: 2 end panels, 2 poly end panel inserts, 1 end bar support, and hardware

End Panel insert standard color is black. To order a white insert add a "W" to the model number, listed below.  
example - 2250-003W = kit, end panels green with white end panel insert

MODELS AVAILABLE	DESCRIPTION
2250-001	kit, end panels black semi-gloss
2250-002	kit, end panels white
2250-003	kit, end panels green
2250-004	kit, end panels blue
2250-005	kit, end panels red
2250-006	kit, end panels silver
2250-007	kit, end panels yellow



## Air & Water Oil Grease

Balcrank recommends using mounting channels or framing strut for installation of these enclosures.

- All steel cabinets have high quality, powder coated finish providing corrosion resistance
- Cabinet design provides smooth and easy operation: prevents hose pinch and reduces wear when pulling from any angle
- Simple installation and serviceability
- Cabinet design ties all reels in the bank together to form one complete rigid structure
- Aluminum end panels with removable poly inserts provides fast and easy serviceability

Channels are designed to build a bank of reels

- When mounting directly to an I-Beam, use Mounting Channel I-Beam Bracket Kit #2230-002 to mount channel to a structural I-beam.

2230-003	Mounting Channel - 1 Reel
2230-004	Mounting Channel - 2 Reel
2230-005	Mounting Channel - 3 Reel
2230-007	Mounting Channel - 5 Reel
2230-002	Mounting Channel I-Beam Bracket Kit. Use two bracket kits for 2 or 3 reels. Use 3 brackets for 5 or 6 reels.



## Hose Reels Accessories



### Hose reel stands

Heavy duty solid steel stands offer an alternative to ceiling or wall mounting hose reels. All stands include mounting plates, gray finish and drip trays to keep unwanted oil off the floor. Available in 3, 5 and 6 reel models. Designed to fit the Evolution, Classic, and Premium Signature series hose reels.

MODELS AVAILABLE	DESCRIPTION
2230-027	3 reel hose stand. Dimensions: 47 x 15.5 x 87.5 inches.
2230-028	5 reel hose stand. Dimensions: 68.9 x 15.75 x 86.6 inches.
2230-029	6 reel hose stand. Dimensions: 78 x 30 x 103 inches.


### Hose reel stand options

Accessories are available for use with the six reel stand 2230-029 only.






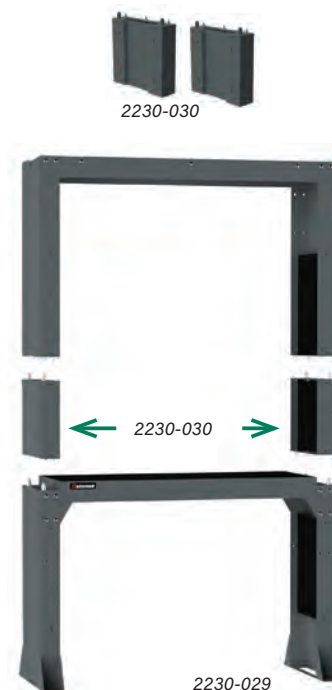

Height extension kits increase the stand height by another 20" and expansion brackets allow for an additional 2-4 reels (2 on each side) to be mounted with a total of 10 possible hose reels. Drip tray keeps unwanted fluids off the floor.

MODELS AVAILABLE	DESCRIPTION
2230-030	Height extension kit Adds 20" additional height. Sold in pairs
2230-031	Expansion bracket Allows 2 additional reels to be mounted on each side of the hose reel stand
2230-032	Drip Tray for use with expansion bracket 2230-031. Purchase one per Expansion bracket

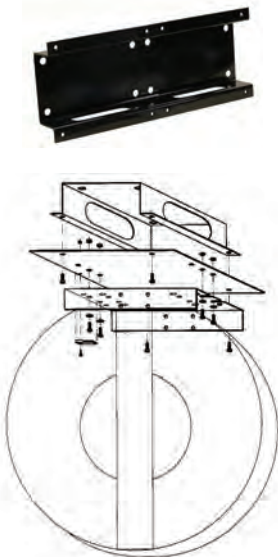For large quantities check lead times with your Balcrank Representative.



## Hose Reels Accessories

MOUNTING CHANNEL COMPONENTS			MOUNTING BRACKET KITS		
<p>Channels are designed to build reel banks of 1 to 6 reels.</p> <ul style="list-style-type: none"> <li>• If mounting directly to an I-Beam, use Mounting Channel I-Beam Bracket Kit #2230-002 to mount channel to a structural I-beam.</li> <li>• Use Mounting Channel plate #2230-014 to install open reel to the channel.</li> </ul>			<p>Specially configured kits are designed to facilitate simple field installation of Balcrank hose reels.</p> <p>NOTE: These kits are not to be used with EV or EVX hose reels</p>		
2230-003	Mounting Channel 1 Reel		2230-026	For use with single EV0, Premium and Classic. Allows the hose reel to be wall mounted to the swivel bracket and pivot horizontally	
2230-004	Mounting Channel 2 Reels				
2230-005	Mounting Channel 3 Reels				
2230-007	Mounting Channel 5 Reels				
2230-002	<p><b>Mounting Channel I-Beam Bracket Kit.</b> Attaches mounting channel (2230-XXX) to facility I-beam structure.</p> <p>Use two bracket kits for 2, 3, or 4 reels. Use 3 brackets for 5 or 6 reels.</p>		2230-024	<p><b>Quick Mounting Plate</b> For use with single EV0, Premium and Classic reel. No mounting channel required, mounts directly to unistrut. For I-beam mounting order 2230-013</p>	
2230-014	<p><b>Mounting Channel Plate</b> for use with open hose reels and a mounting channel. Easy one person installation made easy, plate is bolted to the mounting channel, providing plug &amp; play mount of open reels.</p> <p>Use one per reel</p> <p>NOTE: Not to be used with Enclosed Hose Reels</p>		2230-013	<p><b>I-Beam Mounting Clamps</b> For use with single EV0, Premium and Classic. Attaches reel directly to structural beams with 4½" to 6½" flange widths or can be used with 2230-024</p>	
			2230-016	<p><b>Mounting Adapter Plate Kit</b> For field installation of a Balcrank Signature™ EV0, Premium, or Classic Series Hose Reels onto a previously installed Graco mounting plate</p>	

## Hose Reels Accessories & Supplies

LUBE CONSOLE	LUBE CONSOLE EXTENSION
	
<b>LUBE CONSOLE 2600-001</b>	<b>LUBE CONSOLE EXTENSION 2600-005</b>
Lube Console. Ships with 1 lower hose guide with, 5 console stops, and 2-3/8" accessory stops	Lube Console Extension. Installs next to 2600-001 Lube Console for added capacity Ships with 2 console stops

ACCESSORIES		
		
<b>LUBE CONSOLE LOWER HOSE GUIDE 2600-003</b>	<b>LUBE CONSOLE FLOOR PLATE HOSE GUIDE 2600-006</b>	<b>LUBE CONSOLE BASEMENT/CEILING PLATE 2600-007</b>
Lower Hose Guide	Floor Plate Hose Guide Use with 2230-015 console stop	Basement /ceiling plate with two hose outlets

ACCESSORIES		HOSE STOPS
		Purchase hose to fit the correct hose size
Air Chuck		
	<b>3340-006</b> Short Stub Length, Single Chuck Ball Foot Maximum pressure 145 psi (10 bar)	
Tire Inflator		
	<b>3340-009</b> Single Chuck Tire Inflator, Straight on single outlet chuck <b>3340-010</b> Double Chuck Tire Inflator, Straight on double outlet chuck Maximum pressure 360 psi (25 bar)	
Radiator Water Bibb		
	<b>3340-014</b> Radiator Water Bibb Thumb valve, Rubber spout Maximum pressure 145 psi (10 bar)	
Coiled Hose		<b>2230-015</b> Lube Console Stop
	<b>8137-030</b> , 30' x 3/8" Coiled Air Hose for Air/Water Polyurethane <b>8137-125</b> , 25' x 3/8" Coiled Air Hose for Anti-freeze Nylon 300 psi (21 bar)	<b>2230-009</b> Hose stop for 1/4" ID Hoses
		<b>2230-025</b> Hose stop for 3/8" ID Hoses
		<b>2230-010</b> Hose stop for 1/2" ID Hoses
		<b>2230-011</b> Hose stop for 3/4" ID Hoses
		<b>2230-012</b> Hose stop for 1" ID Hoses

## Hose Reels Light Cord Reels



2510-011



2510-010

MODELS	DESCRIPTION	CORD LENGTH	GAUGE	PLUG	AMPS	RECEPTACLE	LAMP	SERVICE BULLETIN
2510-011	Electric Cord Reel-30' x 10 amps, 3 outlet	30' (10 m)	16/3 SJT	Grounded	10	3 outlets	-	
2510-010	Light Cord Reel-50' x 18 gauge	50' (15 m)	18	Polarized	-	-	13 watt fluorescent - impact resistant	SB 2016

Indoor use only - Dry Locations



2510-012\*



2510-013



2510-014\*\*

MODELS	DESCRIPTION	CORD LENGTH	GAUGE	INLET CORD	PLUG	AMPS	RECEPTACLE	LAMP	SERVICE BULLETIN
2510-012*	Outlet Reel, Saf-T-Iok, 50'	50' (15 m)	16/3 SJTO	5.5' (1.67 m) 16/3 SJTO	NEMA 5-15P Grounded	13	NEMA 5-15R Locking	-	SB 2030
2510-013	Outlet Reel, Duplex, 40'	40' (13 m)	12/3 SJTO		NEMA 5-20P Grounded	20	NEMA 5-20R GFCI Duplex	-	SB 2030
2510-014**	Light Reel, Stubby II/ Tap, 50'	50' (15 m)	16/3 SJTO		NEMA 5-15P Grounded	12	NEMA 5-15R Locking	13 watt fluorescent - impact resistant	SB 2030

SJTO Cord is rated to 300 volts and has a temperature range of -4 °F to 140 °F and features excellent resistance to oil.

Indoor use only - Dry Locations

\*Locking outlet on retracting cord

\*\* Stubby II light with in-line tool tap on retracting cord

### 2130-002 ECONOMY AIR HOSE REEL



50' x 3/8" Economy air hose reel Solid brass swivel and inlet shaft Solid steel pedestal and spool 3 1/2" connecting hose included

### 2520-001 LIGHT W/TOOL TAP



Stubby II Light with tool tap	
Cord Length	1' (.305 m)
Gauge	16/3 SJTOW
Plug	NEMA 5-20P Grounded
Amps	12
Lamp	13 watt fluorescent impact resistant
Receptacle	NEMA 5-15R

Indoor use only - Dry Locations

### 2520-003 LED LIGHT




Stubby II LED light	
Cord Length	1' (.305 m)
Gauge	16/3 SJTOW
Plug	NEMA 5-15P Grounded
Amps	.039
Lamp	13 watt LED impact resistant

Indoor use only - Dry Locations




## Hose Reels Repair Kits

EVO REELS		
REEL MODELS	KIT NUMBER	DESCRIPTION
LOW/MEDIUM PRESSURE		
All LP/MP EVO reels	<b>833029</b>	Swivel seal kit
All EVO reels	<b>833031</b>	Roller outlet
All Enclosed EVO Reels	<b>826175</b>	Roller outlet
All EVO reels	<b>833033</b>	Stop Pawl
All 30' & 50' EVO reels	<b>833032</b>	Spool (including Power Spring - up to 50' of hose)
All Enclosed EVO reels	<b>833292</b>	Spool (including Power Spring - up to 50' + 10' of hose)
HIGH PRESSURE		
All HP EVO reels	<b>833030</b>	Swivel
All EVO reels	<b>833031</b>	Roller outlet
All Enclosed EVO Reels	<b>826175</b>	Roller outlet
All EVO reels	<b>833033</b>	Stop Pawl
All 30' & 50' EVO reels	<b>833032</b>	Spool (including Power Spring - up to 50' of hose)
All Enclosed EVO reels	<b>833292</b>	Spool (including Power Spring - up to 50' + 10' of hose)

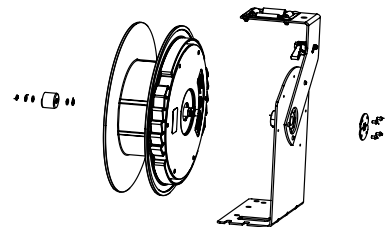


CLASSIC REELS		
REEL MODELS	KIT NUMBER	DESCRIPTION
LOW/MEDIUM PRESSURE		
All LP/MP Classic reels	<b>833314</b>	Swivel with seals
All 30' Classic hose reels	<b>831315</b>	Roller outlet - small arm
All Classic 40' & 50' hose reels; DEF reels, Diesel reel	<b>833313</b>	Roller outlet - large arm
All Enclosed Classic Reels	<b>826175</b>	Roller outlet
All LP/MP Classic reels	<b>833312</b>	Stop Pawl
All 30' Classic hose reels	<b>826728</b>	Power Spring (up to 30' of hose)
All Classic 40' & 50' hose reels; DEF reels, Diesel reel	<b>808966</b>	Power Spring (up to 50' of hose)
HIGH PRESSURE		
All Classic HP reels	<b>809396</b>	Swivel - outlet
All 30' Classic hose reels	<b>831315</b>	Roller outlet - small arm
All Classic 40' & 50' hose reels	<b>833313</b>	Roller outlet - large arm
All Enclosed Classic Reels	<b>826175</b>	Roller outlet
All LP/MP Classic reels	<b>833312</b>	Stop Pawl
All 30' hose reels	<b>826728</b>	Power Spring (up to 30' of hose)
All 40' & 50' hose reels	<b>808966</b>	Power Spring (up to 50' of hose)

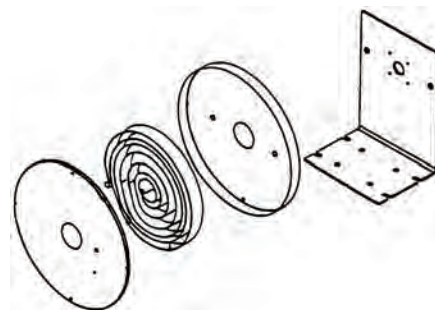


## Hose Reels Repair Kits

PREMIUM REELS		
REEL MODELS	KIT NUMBER	DESCRIPTION
LOW/MEDIUM PRESSURE		
All Premium Reels prior to Year 2012	<b>826175</b>	Roller outlet
All 30' Premium hose reels prior to Year 2012	<b>826728</b>	Power Spring (up to 30' of hose)
All 40' & 50' Premium hose reels prior to Year 2012	<b>808966</b>	Power Spring (up to 50' of hose)
All LP/MP Premium reels after Year 2012	<b>833029</b>	Swivel seal kit
All Premium reels after Year 2012	<b>833031</b>	Roller outlet
All Premium reels after Year 2012	<b>833147</b>	Stop Pawl
All 30', 40', & 50' Premium hose reels after Year 2012	<b>833145</b>	Power Spring (up to 50' of hose)
All 60' Premium hose reels after Year 2012	<b>833146</b>	Power Spring (up to 50' + 10' of hose)
HIGH PRESSURE		
REEL MODELS	KIT NUMBER	DESCRIPTION
All HP Premium Reels prior to Year 2012	<b>809396</b>	Swivel - inlet
All Premium Reels prior to Year 2012	<b>826175</b>	Roller outlet
All 30' Premium hose reels prior to Year 2012	<b>826728</b>	Power Spring (up to 30' of hose)
All 40' & 50' Premium hose reels prior to Year 2012	<b>808966</b>	Power Spring (up to 50' of hose)
All HP Premium reels after Year 2012	<b>833030</b>	Swivel
All Premium reels after Year 2012	<b>833031</b>	Roller outlet
All Premium reels after Year 2012	<b>833147</b>	Stop Pawl
All 30', 40', & 50' Premium hose reels after Year 2012	<b>833145</b>	Power Spring (up to 50' of hose)
All 60' Premium hose reels after Year 2012	<b>833146</b>	Power Spring (up to 50' + 10' of hose)

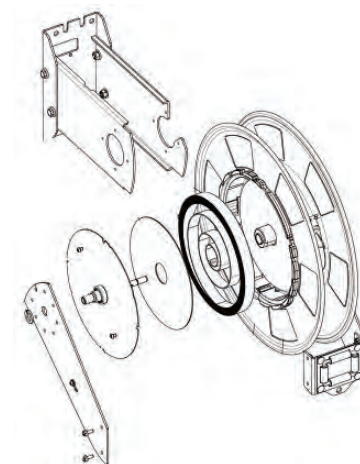

EV REELS		
All EV Reels prior to Year 2009	<b>826175</b>	Roller outlet
All EV reels (except DEF)	<b>833267</b>	Swivel with seals
All EV reels (except DEF)	<b>833266</b>	Seal kit (swivel not included)
All DEF EV reels	<b>833315</b>	Swivel with seals
All DEF EV reels	<b>833316</b>	Seal kit (swivel not included)
All EV reels	<b>833265</b>	Roller outlet
All EV reels	<b>833262</b>	Stop Pawl

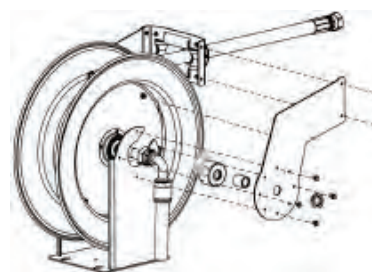

EVX REELS		
All EVX reels	<b>833264</b>	Swivel with seals
All EVX reels	<b>833263</b>	Seal kit (swivel not included)
All EVX reels	<b>833261</b>	Roller outlet
All EVX reels	<b>833262</b>	Stop Pawl

