




304 4" Vapor Recovery Cap

The vapor cap secures the vapor check valve preventing dust and debris buildup. It also protects the vapor poppet of a dual point fill system. Orange in color to indicate vapor recovery lines and lockable to prevent misuse, our vapor cap fits all 4" male quick couplings. The cam action creates a solid push down and pull up movement for fast, easy removal and replacement of cap.

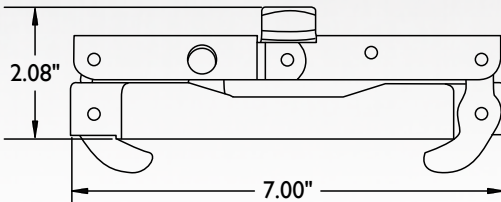

304-200-01

Highlights

- Two body styles to choose from, glass-filled nylon or epoxy coated aluminum.
- Padlock capability.
- Iron-copper infiltrated 4" cams.
- Corrosion-resistant steel hatches.
- Orange body for easy identification.

Model	Material	Weight	
		Lbs.	Kg
304-200-01	Glass-filled nylon	1.19	0.53
304-200-02	Glass filled nylon w/chain	1.19	0.53
304-301-01*	Epoxy coated aluminum	1.38	0.63
304-301-02	Epoxy coated aluminum w/chain	1.38	0.63
304-301-03**	Biofuel cap	1.38	0.63
Model	Description		
777-111-01	Replacement gasket for 304-200-01		
950-215-01	Replacement gasket for 304-301-01		

*CARB: EVR Phase 1 Certification VR-101 and VR-103 and Missouri MOPETP APCP-002-001-99.

**Biofuel approved model (E85 and biodiesel), CARB: EVR Phase 1 Certification VR-101.

Model	Elbow Size	Riser Thread	Height		Body Material	Weight	
			In.	mm		Lbs.	Kg
300-210-01	4"	4"	4.19	107.00	Anodized aluminum	4.30	1.95
300-220-01	4"	4"	4.19	107.00	Brass	12.50	5.66
300-300-01	4"	3"	5.44	139.00	Anodized aluminum	4.30	1.95
300-300-31	4"	3"	5.44	139.00	Anodized aluminum	4.30	1.95
Model	Description						
770-201-02	3" replacement gasket						
770-201-03	4" replacement gasket						

