


Air-Operated Sequential Vapor Valves



Handle fuel vapors safely and efficiently with this lightweight aluminum vapor valve. The air-operated valve allows fast vapor flow during loading and unloading. The poppet is designed to open into the tank, preventing accidental leakage from product surges or from a tank truck rollover. Easy-to-use air line connections are located outside the compartment for convenient installation and maintenance. The 3.5" vapor valve comes with male NPT threads or a TTMA flange for installation in conventional 16" or 20" manholes.



880-343-01

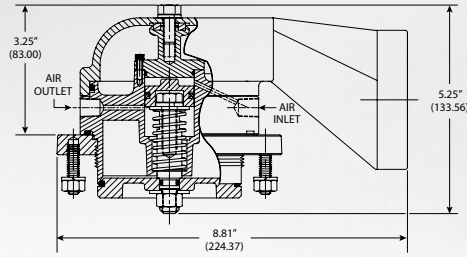

880-345-01

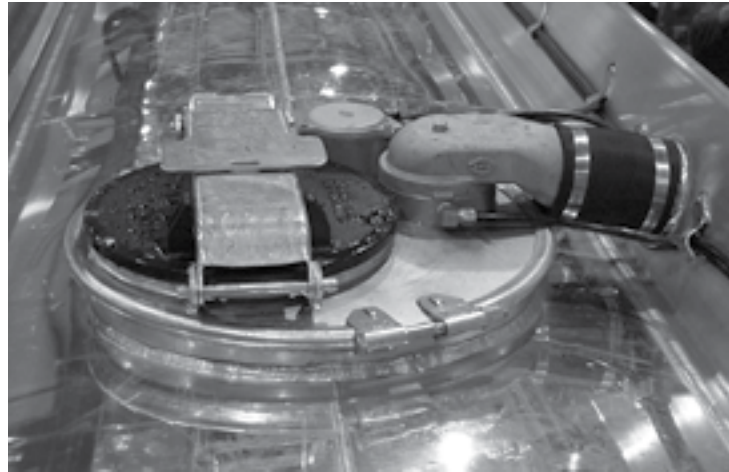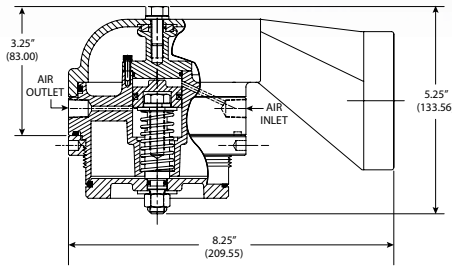


Highlights


- Lightweight aluminum body and hood.
- Fluorocarbon seal.
- TTMA specifications.



Air-Operated Sequential Vapor Valve Parts List

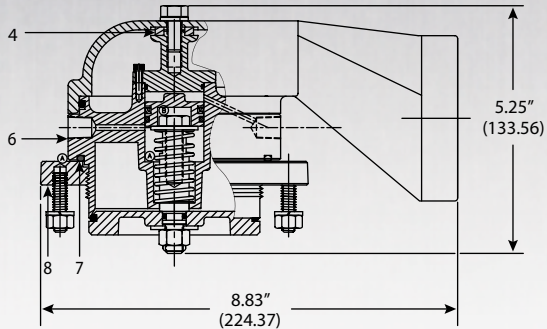

880-343-01

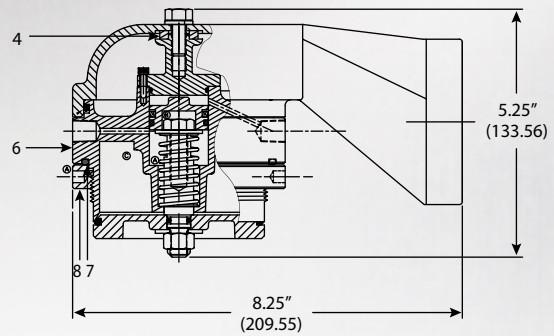

880-345-01

#	Part Name	Part Number
4	Square Cut Seal Ring	11034-03
6	Sequential Vapor Valve Body Assembly	880-344-01
7	O-ring	11003-26
8	Mounting Assembly Flange	880-267-01

Part Number	Description
880-341-01	Flanged without Hood
880-342-01	Threaded without Hood
880-343-01	Flanged with Hood
880-344-01	Vent Valve Only
880-345-01	Threaded with Hood