


HAND PUMPS

GPI provides a variety of hand pumps for use with fuels, oils, hydraulic or transmission fluids and kerosene. Compare the features you need to those in the hand pump section to determine the best pump for you.



PUMP SPECS

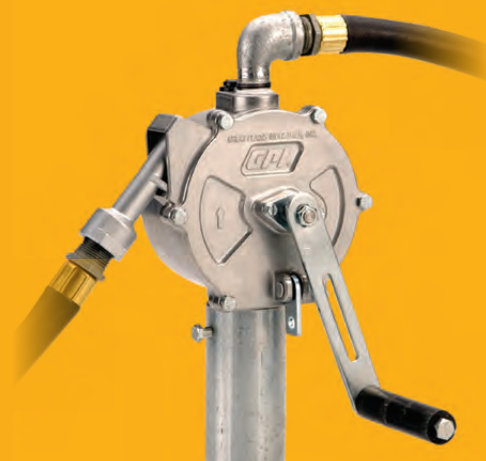

MODEL	RP-10-UL	RP-5
PART NUMBER	123000-06	129003-1
PUMP TYPE	Rotary	Rotary
FLOWRATE	Up to 10 gallons (38 litres) per 100 revolutions.	Up to 8 gallons (30 litres) per 90 revolutions.
NOZZLE TYPE	Metal	Spout
HOSE TYPE	U.L. Listed gasoline hose with S.S. static wire	N/A
HOSE SIZE	8 ft. (2.5m) x 3/4 in.	N/A
TANK FITTING	2 in. NPT	2 in. NPT
INLET/OUTLET SIZE	1 in. / 3/4 in.	N/A
SUCTION PIPE	Adjustable to 40 in.	Three-piece metal
UNIQUE FEATURE	Rotary action and handle locks for security.	Basic, rotary action pump.
USE WITH	Gasoline (up to 15% alcohol blends such as E15), diesel fuel (up to 20% biodiesel blends such as B20) and kerosene. Petroleum products such as medium oil (up to 30W) and hydraulic fluid	Petroleum based fluids having a flash point above 100 Deg F. Diesel fuel (up to 20% biodiesel blends such as B20) and kerosene. Petroleum products such as light oil (up to 10W) and hydraulic fluid
APPROVALS	U.L. Listed	None
WARRANTY	2 Year	90 Days