


12-VOLT PUMP & METER COMBO

weight-centering base. These pumps fit high-flow applications requiring either a 12- or 24-volt DC pump. Contact GPI Customer Service for information on the best pump for your unique application.



**PUMP
SPECS**

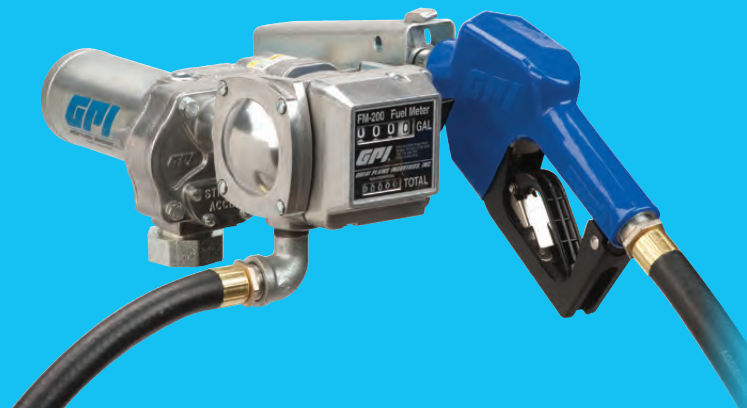

MODEL	12-VOLT PUMP & METER COMBOS	
PART NUMBER	110610-11 M-150S-MU / FM-200-G6N 110610-13 M-150S-AU / FM-200-G6N	110610-12 M-150S-MU / FM-200-L6N 110610-14 M-150S-AU / FM-200-L6N
VOLTAGE & TYPE	12-VOLT DC - Rotary Gear Pump with mechanical meter	
FLOWRATE	Up to 15 GPM (57 LPM)	
DUTY CYCLE	30 min. on / 30 min off	
POWER CORD	18 ft. (5.5 m) x 12/2 AWG	
NOZZLE	Choose automatic or manual shutoff nozzle	
SUCTION PIPE	Adjustable to 40 in.	
HOSE	12 ft (3.7 m) X 3/4 in.	
MOTOR PROTECTION	Circuit breaker	
PRODUCT INCLUDES	M-150S Electric Pump, FM-200 Meter, adjustable suction pipe, hose, power cord and choice of nozzle.	
USE WITH	Gasoline (up to 15% alcohol blends such as E15), diesel fuel (up to 20% biodiesel blends such as B20) and kerosene.	
APPROVALS	Pump Motor - U.L. Listed, CSA Certified Flammable Liquid Dispenser, Meter - U.L. Listed	
WARRANTY	2 Year	