

GPRO™

PROFESSIONAL GRADE FUEL TRANSFER PUMPS

2014-15 CATALOG



ENGINEERED TO DELIVER

Professional Grade Products



25 GPM
12 VOLT



PRO25-012

When reduced fueling time is critical, the high-flow PRO25 delivers with up to 25 GPM.

- Extended Duty Cycle exceeds the industry standard
- Weight centering inlet base includes pressure relief and easy strainer access
- Field replaceable switch and vanes
- 40 amp circuit breaker motor protection
- Extreme Temperature Series (XTS) models available

FOR USE WITH gasoline, diesel fuel and kerosene.
Refer to Owner's Manual for full list of fuels

PRO25-012 SPECIFICATIONS


Flowrate (GPM / LPM)	25 / 95
Voltage	12-volt DC
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Power Cord	18 ft. (5.5 m) x 10/2 AWG
Inlet / Outlet Size	1 in. / 1 in.
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Suction Pipe	Metal, Adjustable to 40 in.
Nozzle Holder	Lockable
Warranty	4 Year

01A METER SPECIFICATIONS

Flowrate (GPM / LPM)	3 to 30 / 10 to 100
Type	Aluminum - Turbine
Display	4-digit LCD
Powered By	(2) AAA Alkaline Batteries

25 GPM
12 VOLT

4 YEAR
PUMP
WARRANTY

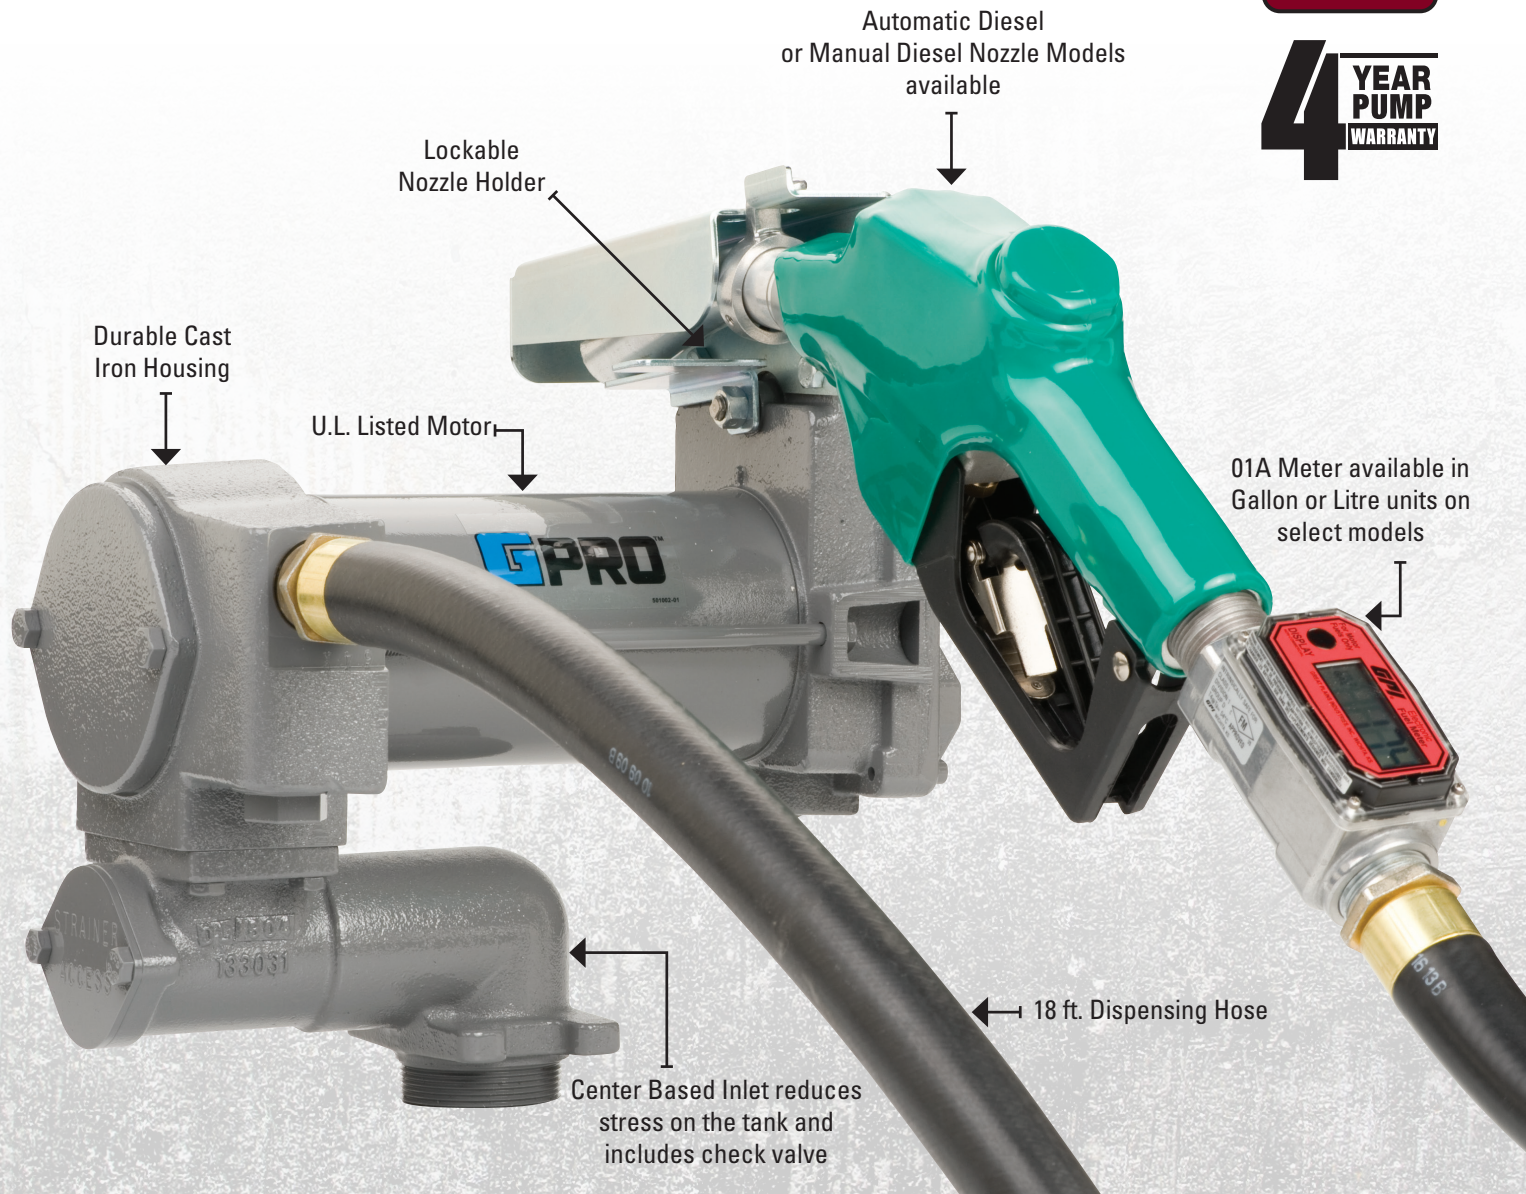

ORDERING INFORMATION							
Model	Part No.	Nozzle	Hose	Suction Pipe	Temperature Rating	Meter	
PRO25-012AD/01AG	502000-60	Automatic Diesel	18 ft.	Metal	-20° F / -29° C	01A31GM Meter (Gallons)	
PRO25-012AD/01AL	502000-61	Automatic Diesel	18 ft.	Metal	-20° F / -29° C	01A31LM Meter (Litres)	
PRO25-012AD	502000-03	Automatic Diesel	18 ft.	Metal	-20° F / -29° C	None	
PRO25-012MD	502000-02	Manual Diesel	18 ft.	Metal	-20° F / -29° C	None	
PRO25-012PO*	502000-01	None	None	None	-20° F / -29° C	None	
PRO25-012AD/XTS	502000-06	Automatic Diesel	18 ft.	Metal	Tested to -40° F / -40° C	None	
PRO25-012PO/XTS*	502000-05	None	None	None	Tested to -40° F / -40° C	None	

ENGINEERED TO DELIVER

4 Year Warranty



20 GPM
115 VOLT

PRO20-115

Impressive 20 GPM flowrate for stationary tank applications. Ideal for fleet, agriculture or industrial applications.

- Extended Duty Cycle exceeds the industry standard
- Weight centering inlet base includes pressure relief and easy strainer access
- Field replaceable switch and vanes
- Tank Adapter included
- Thermally protected motor
- Vacuum Breaker Ready
- Extreme Temperature Series (XTS) models available

FOR USE WITH gasoline, diesel fuel and kerosene.
Refer to Owner's Manual for full list of fuels




PRO20-115 SPECIFICATIONS

Flowrate (GPM / LPM)	20 / 76
Voltage	115-volt AC
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 in. / 1 in.
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Nozzle Holder	Lockable
Warranty	4 Year

20 GPM
115 VOLT

4 YEAR
PUMP
WARRANTY

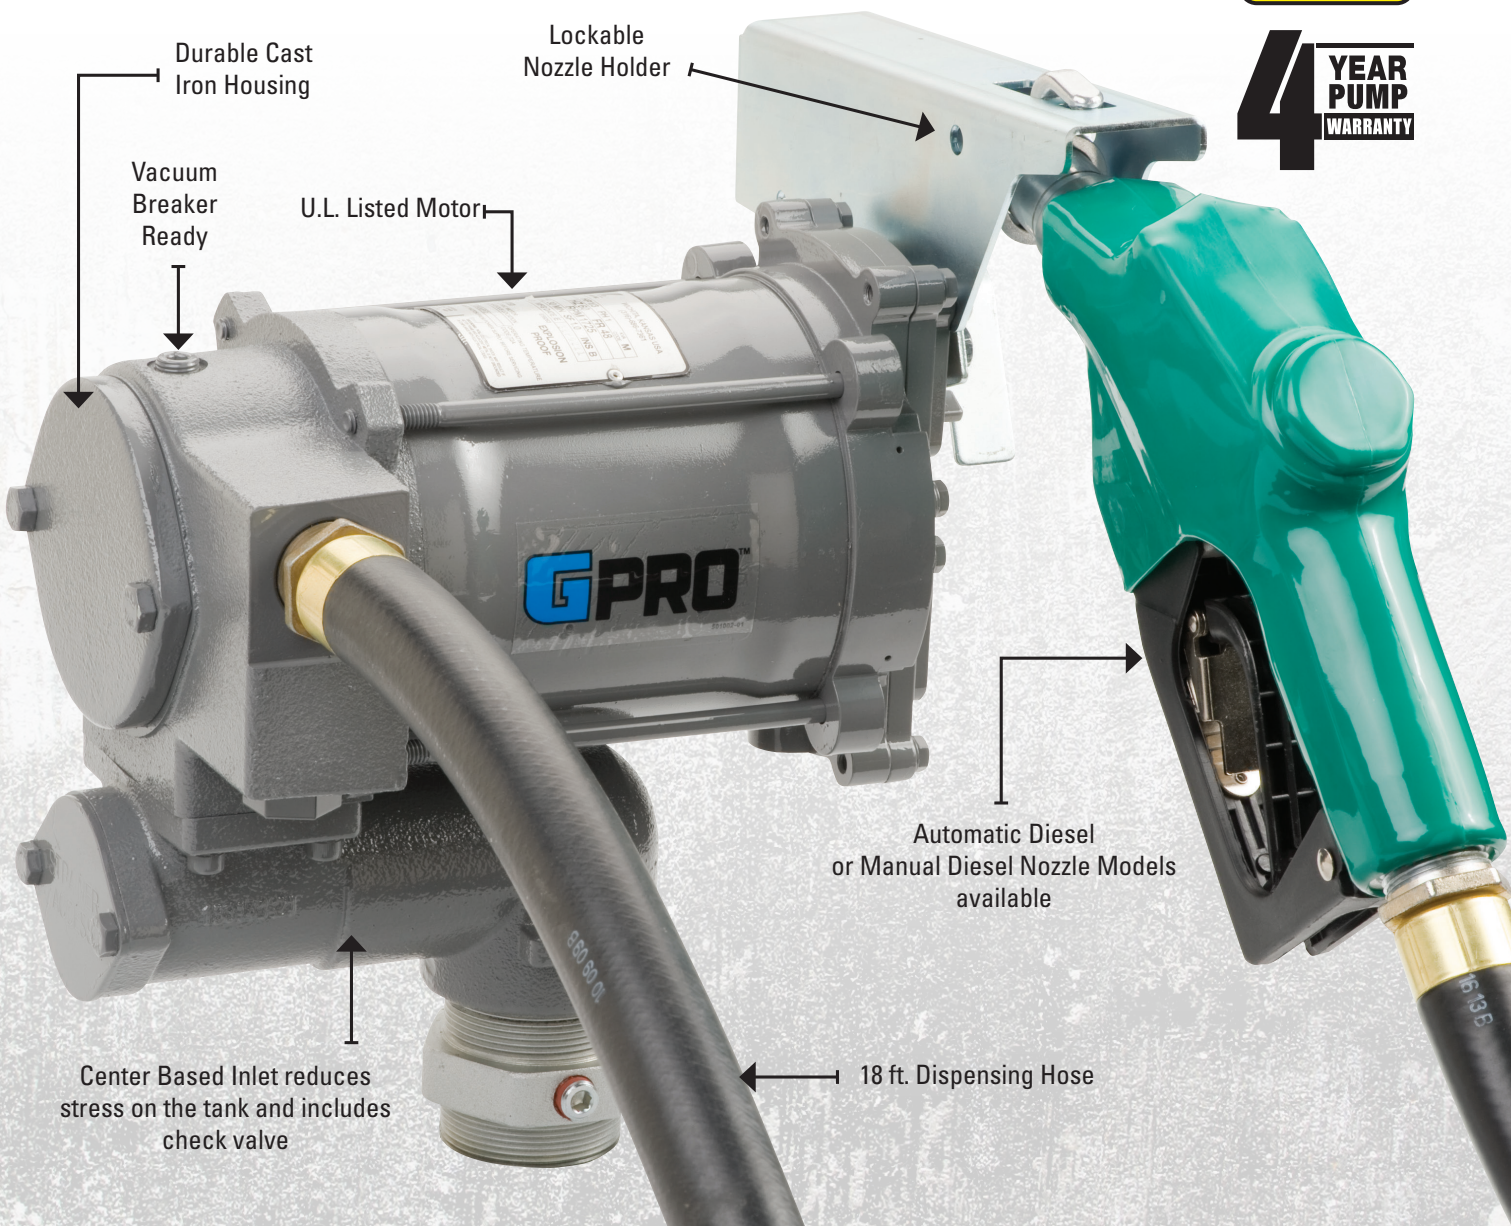

ORDERING INFORMATION				
Model	Part No.	Nozzle	Hose	Temperature Rating
PRO20-115AD	503000-03	Automatic Diesel	18 ft.	-20° F / -29° C
PRO20-115MD	503000-02	Manual Diesel	18 ft.	-20° F / -29° C
PRO20-115RD	503000-04	None	None	-20° F / -29° C
PRO20-115PO	503000-01	None	None	-20° F / -29° C
PRO20-115AD/XTS	503000-06	Automatic Diesel	18 ft.	Tested to -40° F / -40° C
PRO20-115PO/XTS	503000-05	None	None	Tested to -40° F / -40° C

ENGINEERED TO DELIVER

Extended Duty Cycles



35 GPM
115/230
VOLT

PRO35-115

Engineered for high performance and longevity, the PRO35 gets the job done fast and efficiently.

- Extended Duty Cycle exceeds the industry standard
- Weight centering inlet base includes pressure relief and easy strainer access
- Field replaceable switch and vanes
- Tank Adapter included
- Thermally protected motor
- Vacuum Breaker Ready
- Extreme Temperature Series (XTS) models available

FOR USE WITH gasoline, diesel fuel and kerosene.
Refer to Owner's Manual for full list of fuels



PRO35-115 SPECIFICATIONS

Flowrate (GPM / LPM)	35 / 132
Voltage	115- or 230-volt AC
Type	Carbon Vane
Duty Cycle (On / Off)	30 min. / 30 min.
Inlet / Outlet Size	1 1/4 in. FNPT Inlet / 1 in. FNPT Outlet
Dispensing Hose	18 ft. (5.5 m) x 1 in.
Nozzle Holder	Lockable
Warranty	4 Year

35 GPM
115/230
VOLT

4 YEAR
PUMP
WARRANTY



Durable Cast Iron Housing

Vacuum Breaker Ready

U.L. Listed Motor

Lockable Nozzle Holder

18 ft. Dispensing Hose

Center Based Inlet reduces stress on the tank and includes check valve

Automatic Diesel or Manual Diesel Nozzle Models available

ORDERING INFORMATION

Model	Part No.	Nozzle	Hose	Temperature Rating
PRO35-115AD	504000-03	Automatic Diesel	18 ft.	-20° F / -29° C
PRO35-115MD	504000-02	Manual Diesel	18 ft.	-20° F / -29° C
PRO35-115RD	504000-04	None	None	-20° F / -29° C
PRO35-115PO	504000-01	None	None	-20° F / -29° C
PRO35-115AD/XTS	504000-06	Automatic Diesel	18 ft.	Tested to -40° F / -40° C
PRO35-115PO/XTS	504000-05	None	None	Tested to -40° F / -40° C



ENGINEERED TO DELIVER

At 40° Below



Extreme Temperature Series

- Tested to -40° F (-40° C)
- XTS Hose Temperature is rated to -65° F (-54° C)
- XTS Nozzle Temperature is rated to -60° F (-51° C)

4 YEAR PUMP WARRANTY

ORDERING INFORMATION

Model	Part No.	Model	Part No.	Model	Part No.
PRO20-115AD/XTS	503000-06	PRO25-012AD/XTS	502000-06	PRO35-115AD/XTS	504000-06
PRO20-115PO/XTS	503000-05	PRO25-012PO/XTS	502000-05	PRO35-115PO/XTS	504000-05

20 GPM
115 VOLT

25 GPM
12 VOLT

35 GPM
115/230 VOLT

©2014 Great Plains Industries, Inc. All Rights Reserved. 08/14 COM_1012

Wichita · Sydney · Mexico City

GREAT PLAINS INDUSTRIES



Great Plains Industries, Inc. / 800-835-0113 / GPI.net

