


ELECTRIC SUBMERSIBLE PUMPS

Slim, lightweight, CSA-listed submersibles feature top discharge as well as a cast iron impeller and casing, and stainless steel motor housing and shaft. Pump motor is thermal overload protected. Optional mercury-free piggyback float switch available in lengths of 33 and 50 feet.

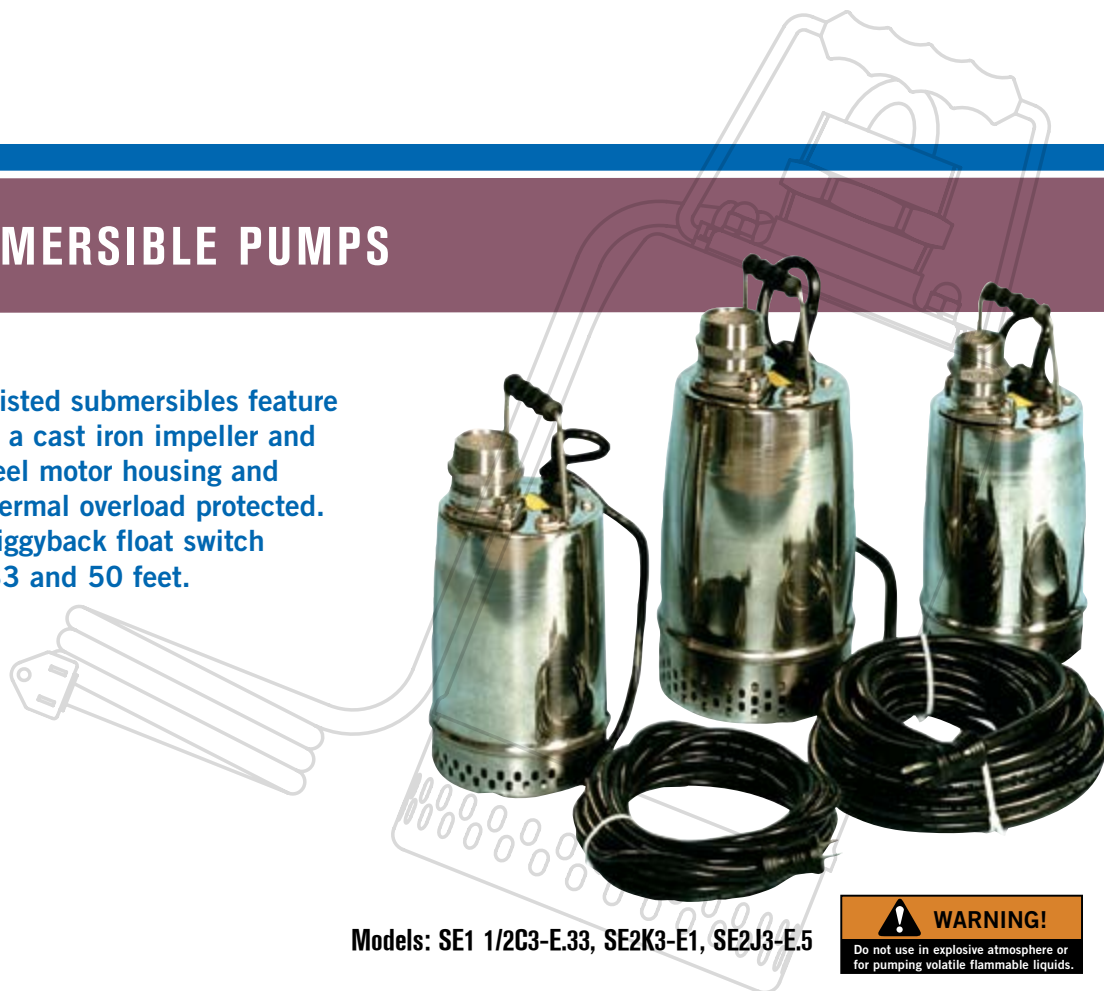

Models: SE1 1/2C3-E.33, SE2K3-E1, SE2J3-E.5

WARNING!
Do not use in explosive atmosphere or for pumping volatile flammable liquids.

FEATURES

- Lightweight slim design
- Thermal overload protected
- Upper seal: Viton® carbon/ceramic
Lower seal: Viton® silicon/carbide/ceramic
- Oil-lubricated seals, nitrile O-rings
- Cast iron impeller and casing
- Stainless steel motor housing, shaft and hardware
- Long power cables – 33 ft. (10.0 m) on 1/3 hp & 1/2 hp and 50 ft. (15.2 m) on 1 hp
- Optional piggyback mercury-free float switches
- Discharge hose included


GENERAL INFORMATION

Model	Ship Wt. (Approx.)	Driver Type (HP)	Max. Solids	Dis. (NPT)	Basic Construction	Seal Type & Elastomer/Faces	VAC 60 Hz	Phase	Amps	Motor Housing (RPM)
SE1 1/2C3-E.33 115/1	30 lbs.	Electric Motor (1/3)	7/32" (5 mm)	1-1/2"	Stainless Steel/ Cast Iron	Viton®* Carbon/Ceramic Upper, Viton®* Silicon/ Carbide Ceramic Lower	115	1	4	Stainless Steel (3400)
SE2J3-E.5 115/1	31 lbs.	Electric Motor (1/2)	7/32" (5 mm)	2"	Stainless Steel/ Cast Iron	Viton®* Carbon/Ceramic Upper, Viton®* Silicon/ Carbide Ceramic Lower	115	1	6	Stainless Steel (3400)
SE2K3-E1 115/1	50 lbs.	Electric Motor (1)	7/32" (5 mm)	2"	Stainless Steel/ Cast Iron	Viton®* Carbon/Ceramic Upper, Viton®* Silicon/ Carbide Ceramic Lower	115	1	13	Stainless Steel (3400)


*Viton® is a registered trademark of DuPont.

ELECTRIC SUBMERSIBLE PUMPS

SE SERIES

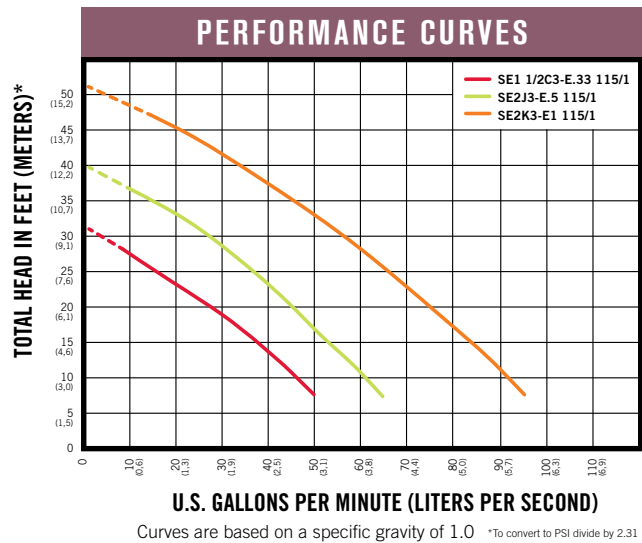

MODEL: SE1 1/2C3-E.33 115/1

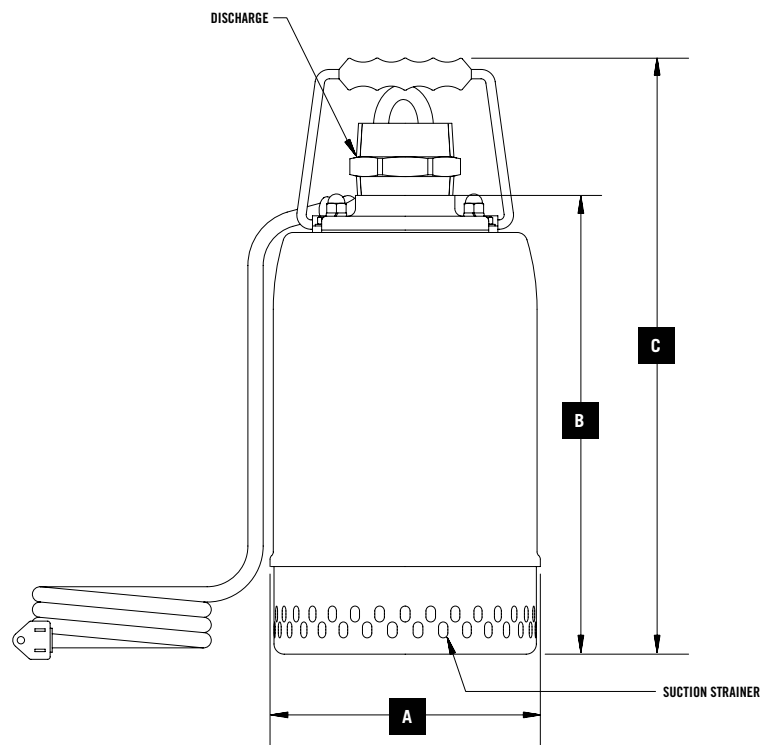

PUMP DIMENSIONAL DATA						
INCHES (MILLIMETERS)						
Model	A	B	C	Discharge*	Cable Length	Suction Strainer
SE1 1/2C3-E.33 115/1	6.66	11.25	14.50	1.50	32.81 ft./(10,0 m)	.24 (6,1 mm) x .39 (9,9 mm) slots located on .31 (7,9 mm) staggered centers
	(169,20)	(285,80)	(368,30)			
SE2J3-E.5 115/1	6.66	11.13	14.50	2.00	32.81 ft./(10,0 m)	.24 (6,1 mm) x .39 (9,9 mm) slots located on .31 (7,9 mm) staggered centers
	(169,20)	(282,70)	(368,30)			
SE2K3-E1 115/1	7.55	13.75	17.12	2.00	50 ft./(15,2 m)	.25 (6,4 mm) x .38 (9,6 mm) slots located on .50 (12,7 mm) staggered centers
	(191,80)	(349,20)	(434,80)			

*Standard NPT Pipe Threads

