




**WATER
SIDE WINDER**

MEDIUM DUTY DISCHARGE

FEATURES & APPLICATIONS:

- Designed for medium duty water discharge applications in agriculture, construction, industry, & mining. Abrasion resistant PVC cover, & PVC tube provide long service life. Rolls up flat for easy storage.

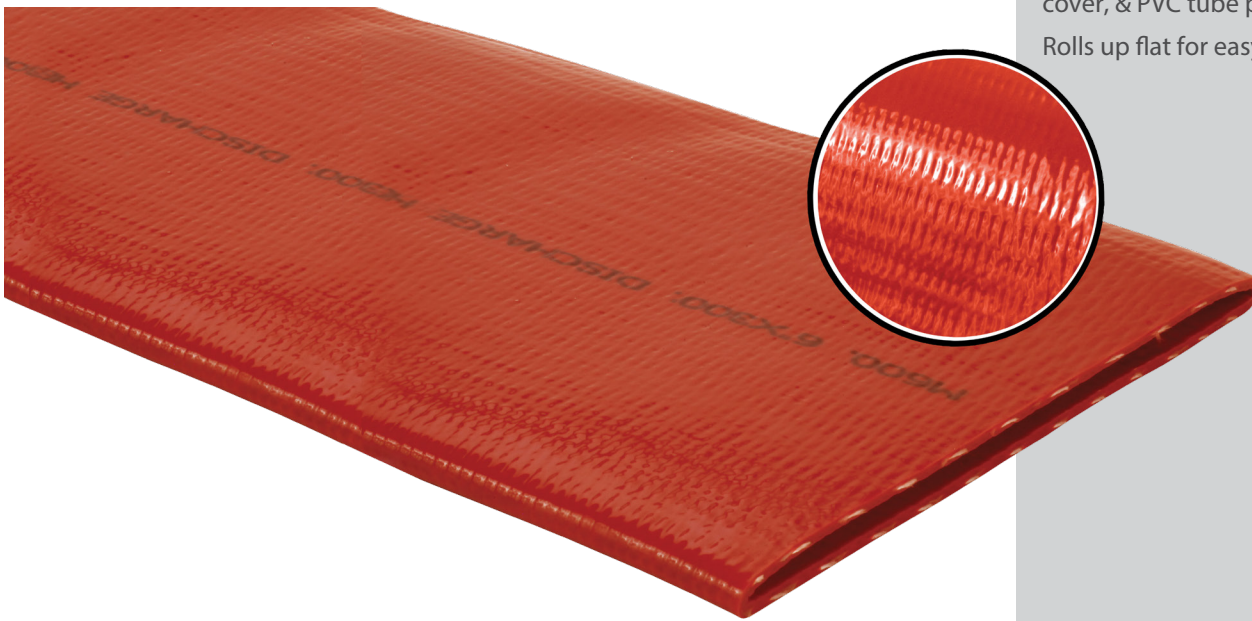

TECHNICAL DATA:

- **Temp Range:** -10° F to +150° F
- **Cover:** Red PVC
- **Tube:** Red PVC
- **Reinforcement:** 2 spiral plies & 1 longitudinal ply
- **Safety Factor:** 3:1 min
- **Branding:**

RED PVC

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
1-1/2"	---	300'	150	450	n/a	64	n/a	M 150
2"	---	300'	150	450	n/a	85	n/a	M 200
2-1/2"	---	300'	150	450	n/a	123	n/a	M 250
3"	---	300'	150	450	n/a	145	n/a	M 300
4"	---	300'	125	375	n/a	205	n/a	M 400
6"	---	300'	115	345	n/a	352	n/a	M 600
8"	---	300'	70	210	n/a	440	n/a	M 800



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.