




## CONTITECH

LAYFLAT - 2700 YELLOW DISCHARGE

### FEATURES & APPLICATIONS:

- General water suction & discharge hose for industry, agriculture, construction & septic tank cleaning. It is 50% lighter than rubber.
- The working pressure are based on ambient temperature of 70° F & will vary inversely with temperature changes.

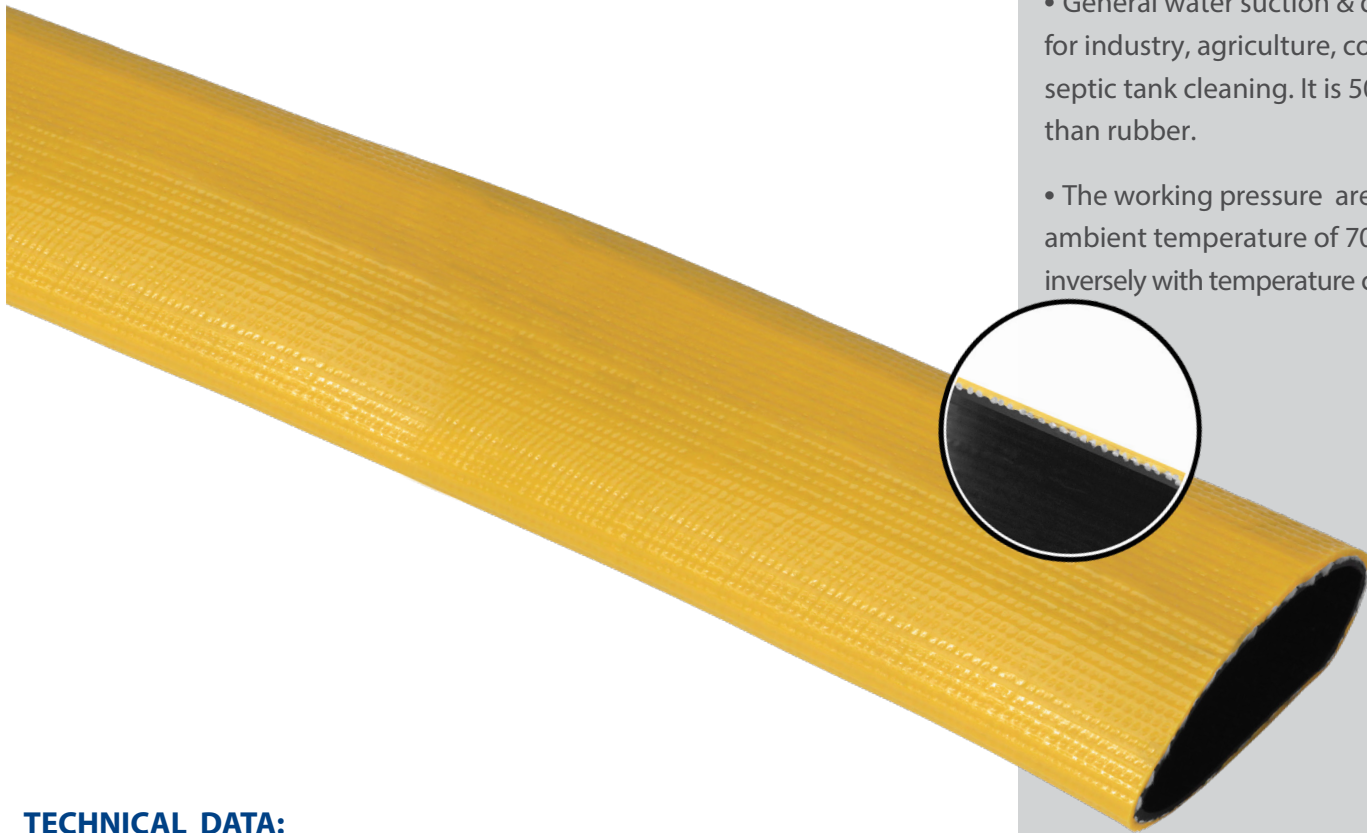

### TECHNICAL DATA:

- **Temp Range:** -10° F to +150° F
- **Cover:** Yellow fire retardant Pliovic® MSHA 2G-14C/15 approved
- **Tube:** Yellow fire retardant Pliovic®
- **Reinforcement:** 2 spiral plies & 1 longitudinal synthetic fiber
- **Safety Factor:** 3:1 min
- **Branding:**

### YELLOW PLIOVIC® SYNTHETIC

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
1-1/2"	1.72"	300'	200	---	---	0.324	n/a	2700 150
2"	2.22"	300'	200	---	---	0.420	n/a	2700 200
2-1/2"	2.75"	300'	200	---	---	0.620	n/a	2700 250
3"	3.38"	300'	200	---	---	0.760	n/a	2700 300
4"	4.33"	300'	150	---	---	1.00	n/a	2700 400
6"	6.48"	300'	150	---	---	1.60	n/a	2700 600



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.