

4115


SITE SPECIFICATIONS

- **BAY HEIGHT:** 78" rise plus vehicle
- **BAY WIDTH:** 12' recommended
- **BAY DEPTH:** 24' recommended / 26' rec. for extended models
- **POWER REQ.:** 208-230v Single Phase*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days
- **AIR REQUIRED:** 90-120 psi



SERVICE BAY LAYOUT

4115 EFO/XFO shown

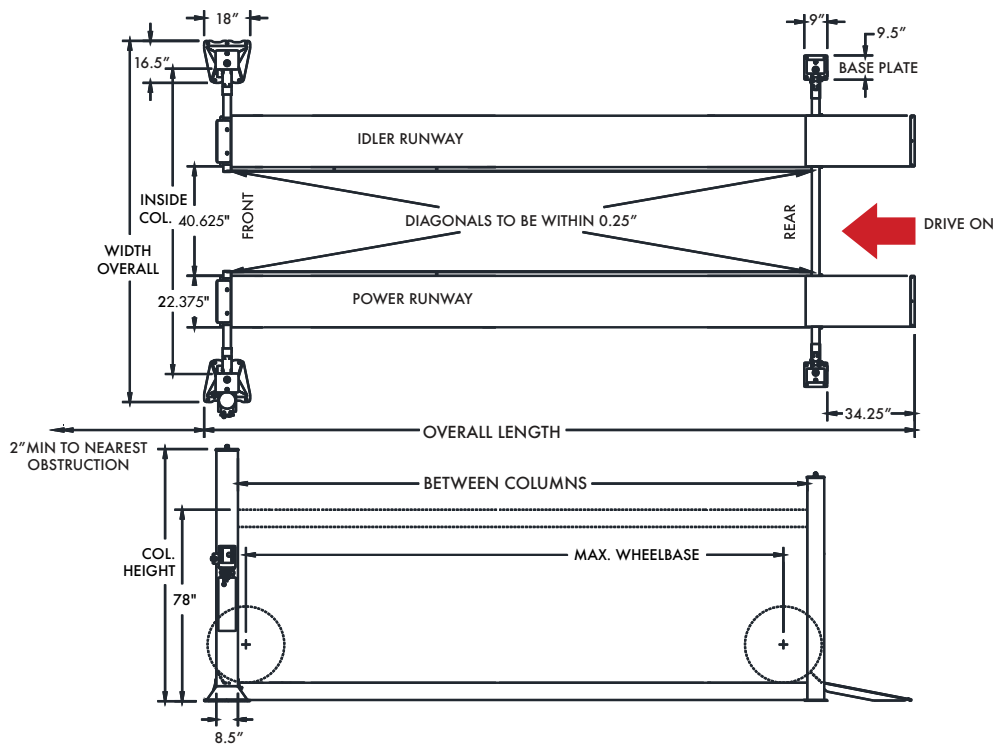

Model Number	4115EFO	4115XFO	4115EFX	4115AFX
Lifting Capacity	15,000 lbs.			
Front	Open		Closed	
Max. Wheelbase	183"	210.5"	183"	210.5"
Rise Height	78"			
Overall Length	250.75"	277"	247.75"	275.5"
Overall Width	142" front / 141.75" rear		141.75"	
Inside Columns	120.75" front / 125.5" rear		125.5"	
Between Columns	195"	222.5"	196"	223.5"
Height of Columns	99.5" front / 98" rear		98"	
Width of Runways	22.375"			
Height of Runways	7"			
Width Btw. Runways	40.625"			
Air Supply Required	90-120 psi			
Motor / Voltage	2HP, 208v-230v, 60Hz, 1Ph			
Rise Time	85 s			
Min. Recomm. Bay Size	12' x 24'	12' x 26'	12' x 24'	12' x 26'
ALI/ETL Certified	√	√	√	√
Colors Available				

*3-phase upgrade is available for purchase

www.challengerlifts.com
1-800-648-5438