

# AR4115


## SITE SPECIFICATIONS

- **BAY HEIGHT:** 78" rise plus vehicle
- **BAY WIDTH:** 12' recommended
- **BAY DEPTH:** 24' recommended / 26' rec. for extended models
- **POWER REQ.:** 208-230v Single Phase\*, 30-amp breaker
- **MIN. CONCRETE SPEC:** 4" thick, reinforced, free from cracks/seams, rated at 3500+ psi, cured at least 28 days
- **AIR REQUIRED:** 90-120 psi



## SERVICE BAY LAYOUT

AR4115 EFO/XFO Alignment Rack Package shown

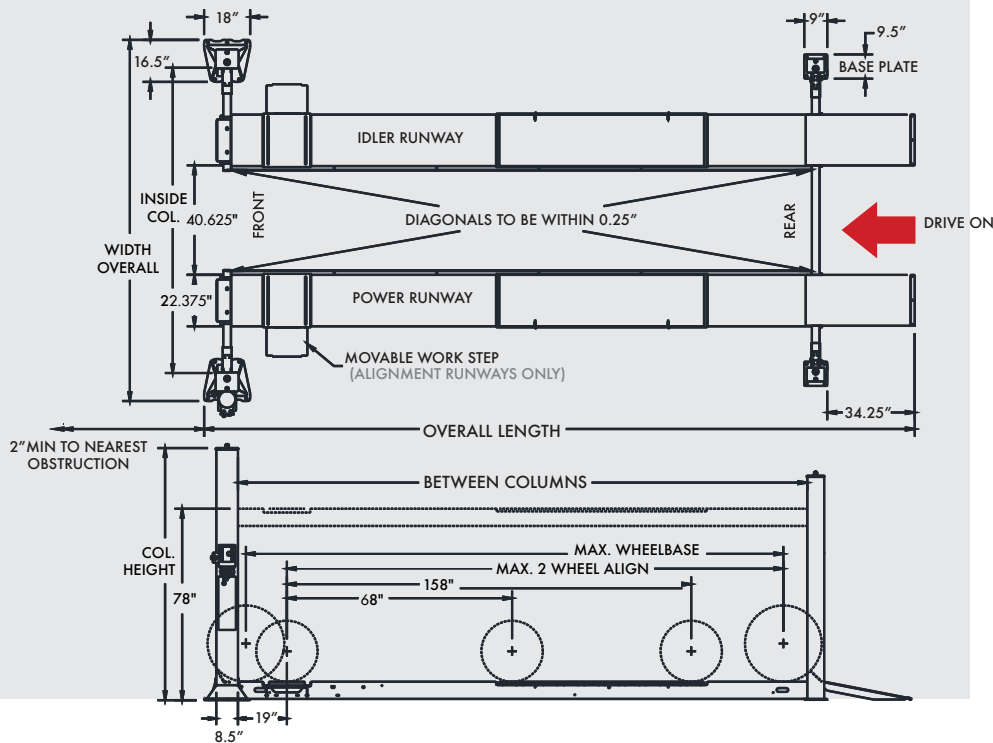

Model Number	AR4015EAO	AR4015XAO	AR4015EAX	AR4015XAX
Lifting Capacity	15,000 lbs.			
Front	Open		Closed	
Max. Wheelbase	183"	210.5"	183"	210.5"
Rise Height	78"			
Overall Length	250.75"	277"	247.75"	275.5"
Overall Width	142" front / 141.75" rear		141.75"	
Inside Columns	120.75" front / 125.5" rear		125.5"	
Between Columns	195"	222.5"	196"	223.5"
Height of Columns	99.5" front / 98" rear		98"	
Width of Runways	22.375"			
Height of Runways	7"			
Width Btw. Runways	40.625"		40.625"	
Air Supply Required	90-120 psi			
Motor / Voltage	2HP, 208v-230v, 60Hz, 1Ph			
Rise Time	85 s			
Min. Recomm. Bay Size	12' x 24'	12' x 26'	12' x 24'	12' x 26'
ALI/ETL Certified	√	√	√	√
Colors Available				

\*3-phase upgrade is available for purchase

\*Includes movable work steps, (2) RJ7.5 jacks, recessed stainless steel turn tables, rear slip plates and airline kit

www.challengerlifts.com  
1-800-648-5438