## DEF Systems TECHNICAL DATA SHEET



The GPI DEF Pump Systems are available in two power supply options: 115V (AC) for stationary applications and 12V (DC) for mobile applications.

## **WETTED MATERIALS** (ALL MODELS)

Pump Housing:	Nylon
Diaphragm:	TPU
Seals:	EPDM
Motor Shaft & Fasteners:	Stainless Steel

## SPECS (ALL MODELS)

Max.	Flow Rate:	8 GPM   30 L/min
Max	. Discharge Pressure:	Up to 23 PSI (1.6 bar)
At Sea Level 70° F (21.1° C)	Suction Lift:	Up to 9 ft. (2.75 m)
	Discharge Lift:	Up to 15 ft. (4.5 m)
Warranty:		Two-Year Pump and Meter


FLUIDS
Diesel Exhaust Fluid (DEF)

## DOSTS-115DA+T32+CK 115VAC Voltage (Power Source)





### **DEF SYSTEM MODEL NUMBERS**

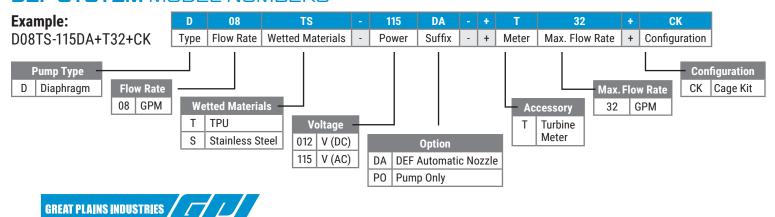

## DEF Systems TECHNICAL DATA SHEET




### **SPECS** (ALL MODELS)

Туре:	Oscillating Diaphragm
Motor RPMs:	1750
Duty Cycle:	20 min.

Operating Temperature:	23° F to 104° F (-5° C to 40° C)
Inlet:	¾ in. Hose Barb
Outlet:	¾ in. Hose Barb
Mounting Type:	Cage Kit

Dispensing Hose:	20 ft. (6 m) x ¾ in.
Inlet Hose:	6.5 ft. (2 m) x ¾ in.
Nozzle:	¾ in. NPT Inlet, Automatic Shut-Off, DEF

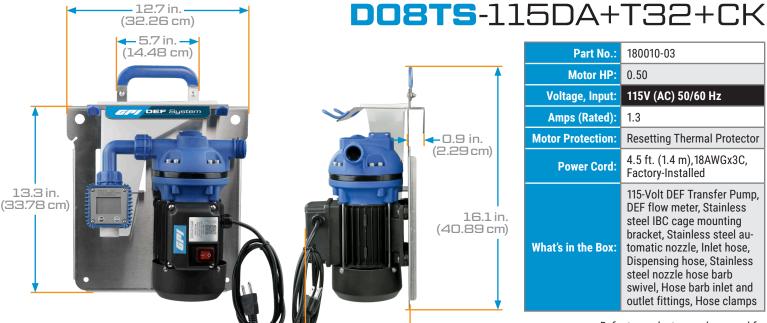

— 7.3 in. — (18.54 cm)

Refer to product owner's manual for installation and safety instructions.

# 12.7 in. (32.26 cm) -5.7 in. (14.48 cm)

## 16.1 in. (40.89 cm) -5.6 in. (14.22 cm)

Part No.:	180012-03
Motor HP:	0.24
Voltage, Input:	12V (DC)
Amps (Rated):	14.8
Motor Protection:	15 Minute Timer Circuit
Power Cord:	4.5 ft. (1.4 m),14AWGx2C, Factory-Installed
What's in the Box:	12-Volt DEF Transfer Pump, DEF flow meter, Stainless steel IBC cage mounting bracket, Stainless steel au- tomatic nozzle, Inlet hose, Dispensing hose, Stainless steel nozzle hose barb swivel, Hose barb inlet and outlet fittings, Hose clamps

Refer to product owner's manual for installation and safety instructions.

### **DIMENSIONS**

**DIMENSIONS** 



DOSTS-012DA+T32+CK