Introducing Lincoln's New Family of Power Cord and Light Reels





LIGHT DUTY





Model 91024

Cord Type/Length:	SJTOW / 30 ft.	SJTOW / 30 ft.
Cord Thickness:	18 AWG	16 AWG
No. of Conductors:	2	3
Pigtail:	4 ft. with 2-prong plug	4 ft. with 3-prong plug
Voltage/Current:	125 VAC / NA	125 VAC / 10A
End Accessory:	13W fluorescent light	Triple tap

HEAVY DUTY





Model 91030


Model 91031

End Accessory:		Single receptacle	Single receptacle
Voltage/Current:		125 VAC / 13A	125 VAC / 20A
Pig	gtail:	4 ft. with 3-prong plug	4 ft. with 3-prong plug
No. of Conductors:		3	3
Cord Thickness:		16 AWG	12 AWG
Cord Type/Length:		SJTOW / 50 ft.	SJEOW / 45 ft.

MEDIUM DUTY



HEAVY DUTY

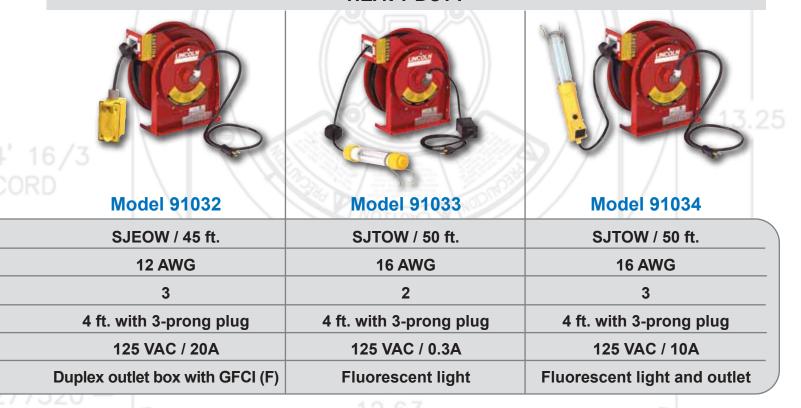

Light-Duty Reel Features

- 30 ft. SJTOW cold weather compatible cord grease, oil and water resistant
- Available with fluorescent light or trip tap extensions
- Steel housing
- Adjustable cord stop with anti-kink cord spring
- Wall or ceiling mounting
- Perfect for home, small service shops and tire/muffler/fast lube shops

O AVOID TO THE TOTAL TOT

Medium-Duty Reel Features

- 50 ft. SJTOW cold weather compatible cord grease, oil and water resistant
- Available with LED, fluorescent light or trip tap extensions
- Heavy-duty flame-resistant ABS housing
- Adjustable cord stop with anti-kink cord spring
- Wall, ceiling or bench mount with three fixed-angle position steel mounting bracket
- Perfect for vehicle maintenance and industrial environments

Heavy-Duty Reel Features

- Cord is cold weather compatible grease, oil and water resistant
- Available with fluorescent light, with and without power tap, single outlets, dual GFCI outlets
- Spring retractable with latch
- Engineered for heavy-duty, industrial use
- Adjustable cord stop
- Wall, ceiling or bench mount
- Perfect for vehicle maintenance and industrial environments





Form No. 444561 (3/11) © Copyright 2011

