

Catalog # :

Project :

Prepared By :

Date :



S8' LED Strip



The sleek architectural S is designed with toolless entry features saving time and money on installation. Optimizing industry leading LED technology, the series delivers unparalleled performance and efficiency meeting stringent energy requirements. Offering 3000K, 3500K, 4000K and 5000K color temperatures. Innovative programmable drivers offer expansive lumen packages and comes standard with 0-10V dimming down to 1%. Designed with uncompromised aesthetics, the high-performance luminaire is well suited for commercial, industrial, retail and residential applications.

Features & Specifications

Optical System

- Use of closely spaced medium-power, high brightness chips provides uniform luminance.
- Available in 5000K, 4000K, 3500K, and 3000K color temperatures per ANSI C78.377. Consult Factory for other color temperature requirements.
- Minimum CRI of 80.

Electrical


- High-performance programmable driver features overvoltage, under voltage, short-circuit and over temperature protection. Custom lumen and wattage packages available.
- 0-10 volt dimming (1% - 100%) standard.
- Standard Universal voltage (120-277 Vac) Input 50/60 Hz. Optional high Voltage 347 Vac Input available, consult factory for lead time and DLC® qualification information. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- L70 Calculated Life: >60k Hours @ 25°C per IESNA TM-21-11. (See Lumen Maintenance on Page 2)
- Total harmonic distortion: <20%
- Power factor: >.90
- Input power stays constant over life.
- Optional (120-277V) integral 10 watt battery backup is available. The 90-minute batteries provide constant power to the LED system. The fixture delivers 1300 lumens during emergency mode. A test switch/indicator button is installed in the housing for ease of maintenance.

Controls


- Optional Bolt-on integral passive infrared motion and/or daylight sensor activates switching of luminaire light levels (see page 5 for more details).
- Optional Step-level dimming driver allows system to be switched to 50% power for compliance with common energy codes while maintaining fixture appearance.



Dimensions




TOP VIEW

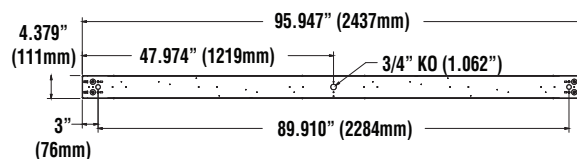

BOTTOM VIEW



SIDE VIEW



END VIEW



Features & Specifications (cont.)

Construction

- Rigid housing is die-formed 22-gauge cold rolled steel for consistency and strength.
- Available for individual or continuous row mounting.
- Tool-less access by applying pressure/squeezing the ends of the electrical housing channel to remove the light engine assembly to access the wire-way chamber
- Luminaire is proudly manufactured in the U.S of U.S. and imported components.
- Luminaire is painted after fabrication following treatment with phosphate rust inhibitor. Finish coat of housing is high reflectance white (minimum 92%) polyester powder.
- Shipping weight: 16 lbs

Installation

- Suitable for surface, pendant, grid and chain mounting.
- Accepts optional plug-in wiring feature for continuous row installation.
- Alignment couplers furnished for continuous row installation.

Warranty

- LSI LED Fixtures carry a 5-year warranty.
- 1 Year warranty on optional Battery Backup. Test regularly in accordance with local codes.

Listing

- Listed to UL 1598 and UL 8750 for 25°C Ambient applications
- RoHS Compliant.
- State of California Title 24 compliant with OCSUE/DHSUE option.
- American Recovery and Reinvestment Act Funding Compliant.
- Suitable For Damp Locations.

Photometry

- See website for IES and photometric files

Performance

| S8 ELECTRICAL DATA (Amps)* | | | | |
|----------------------------|-------|-------|-------|-------|
| Lumen Package | 120V | 208V | 240V | 277V |
| 70L | 0.39A | 0.23A | 0.20A | 0.17A |
| 80L | 0.46A | 0.26A | 0.23A | 0.20A |
| 100L | 0.58A | 0.34A | 0.29A | 0.25A |
| 120L | 0.68A | 0.39A | 0.34A | 0.29A |
| 140L | 0.80A | 0.46A | 0.40A | 0.34A |
| 160L | 0.92A | 0.53A | 0.46A | 0.40A |
| 180L | 1.06A | 0.61A | 0.53A | 0.46A |

*Electrical data at 25C (77F). Actual wattage may differ by +/-10%.

| Recommended Lumen Maintenance ¹ | | | | | | |
|--|----------------|----------------------|---------------------|---------------------|---------------------|----------------------|
| LUMENS | AMBIENT TEMP C | INITIAL ² | 25K HR ² | 50K HR ² | 75K HR ³ | 100K HR ³ |
| 80L | 25C | 99% | 97% | 95% | 94% | 92% |
| 180L | 25C | 98% | 95% | 92% | 89% | 86% |

Specifications and dimensions subject to change without notice.

- 1 - Lumen maintenance values at 25C are calculated per TM-21 based on LM-80 data and in-situ testing.
- 2 - In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times the IESNA LM-80-08 total test duration for the device under testing
- 3 - In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times the IESNA LM-80-08 total test duration for the device under testing

*LED chips are frequently updated therefore values are subject to change.



Performance (cont.)

| S8 DELIVERED LUMENS* | | | | | | | | | | |
|----------------------|-----|------------------|----------|------------------|----------|------------------|----------|------------------|----------|---------|
| LUMEN PACKAGE | CRI | 3000K CCT | | 3500K CCT | | 4000K CCT | | 5000K CCT | | WATTAGE |
| | | DELIVERED LUMENS | EFFICACY | DELIVERED LUMENS | EFFICACY | DELIVERED LUMENS | EFFICACY | DELIVERED LUMENS | EFFICACY | |
| 70L | 80 | 6879 | 144.2 | 7094 | 149.7 | 7057 | 149.8 | 7504 | 158.3 | 47.1 |
| 80L | 80 | 7818 | 142.9 | 8112 | 148.3 | 8070 | 147.5 | 8581 | 156.9 | 54.7 |
| 100L | 80 | 9727 | 139.6 | 10093 | 144.8 | 10040 | 114.0 | 10676 | 153.2 | 69.7 |
| 120L | 80 | 11660 | 143.8 | 12098 | 149.2 | 12035 | 148.4 | 12797 | 157.8 | 81.1 |
| 140L | 80 | 13582 | 143.1 | 14093 | 148.5 | 14019 | 147.7 | 14907 | 157.1 | 94.9 |
| 160L | 80 | 15522 | 141.0 | 16105 | 146.3 | 16021 | 145.5 | 17036 | 154.7 | 110.1 |
| 180L | 80 | 17494 | 138.5 | 18152 | 143.7 | 18057 | 143.0 | 19201 | 152.0 | 126.3 |

*LED chips are frequently updated therefore values are subject to change.




Luminaire Ordering Guide

TYPICAL ORDER EXAMPLE: **S8 LED 80L UNV DIM1 35 80CRI**


| Family Size | LED Gen | Lumen Package | Lens | Voltage | Driver | Color Temp | CRI | Controls | Options | Packaging |
|--------------|---------|--|----------------|---|---|--|----------------|--|--|-----------------------|
| S8- 8' Strip | LED | 70L - 7000 80L - 8000 100L - 10000 120L - 12000 140L - 14000 160L - 16000 180L - 18000 Custom Lumens ³ | (Blank) - None | UNV - 120-277v 347 - 347V ¹ | DIM1 - Dims to 1%(0-10V) SD50 - Step dimming to 50% ² | 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K | 80CRI - 80 CRI | (Blank) - None OCSUE - Occupancy Sensor 120-277V ² DHSUE - Daylight harvesting/Occupancy Sensor 120-277V ² | (Blank) - None EM10 - 10W Battery Backup (1300 Lumens) ² PM1 - 9FT Pre-wired plug in assembly (standard) ² PM1LV - 9FT Pre-wired plug in assembly (0-10V Dimming) ² PM2 - 9FT Pre-wired plug in assembly (SD50 or EM10) ² PM2LV - 9FT Pre-wired plug in assembly (SD50 or EM10 with 0-10V Dimming) ² | (Blank) - Single Pack |

1. Consult factory for leadtime & DLC qualifications.
2. Not available with 347V
3. Custom lumen and wattages available, consult factory. Values are within industry standard tolerances and not DLC listed.


Accessory Ordering Information (Accessories are field installed)




Description: T-Grid Hanger Kit
Order Number: (Qty 2) - 671560




Description: T-Grid Collar (including junction box, wire collar & grid hanger)
Order Number: (Qty 1) - 558651




Description: Chain Hanger Set (36" length)
Order Number: (Qty 2) - M38258




Description: 24" Pendant
Order Number: (Qty 1) - 687400




Description: Chain Hanger Set (60" length)
Order Number: (Qty 2) - 251057



Description: 36" Pendant
Order Number: (Qty 1) - 681509



Description: Wire Guard - 4 foot
Order Number: (Qty 2) - 549301




Description: 48" Pendant
Order Number: (Qty 1) - 687382



Controls

Occupancy Sensor (OCSUE)

- Optional integral passive infrared motion activates switching of luminaire on/off. Standard Factory settings: Luminaire is activated and increased to full bright upon detection of motion. Luminaire powers off when target zone is absent of motion activity for ~5 minutes. See coverage diagram for detection cone.

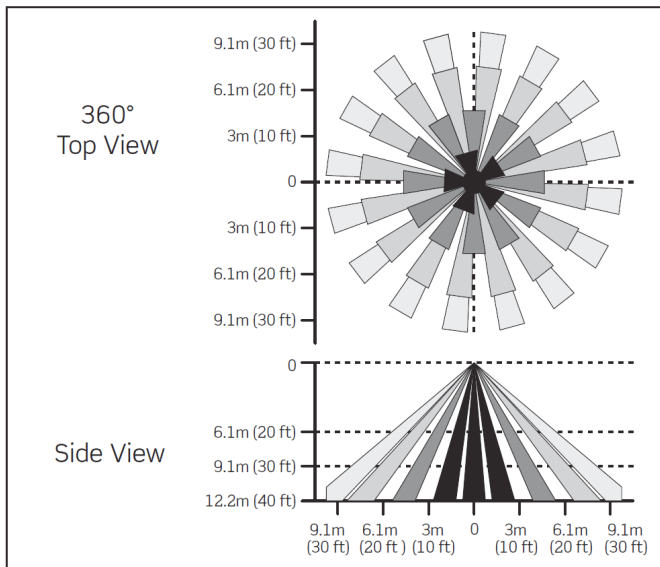

Occupancy Sensor / Daylight Sensor (DHSUE)

- Optional integral passive infrared motion and daylight sensor activates switching of luminaire on/off. Standard Factory settings: Luminaire is activated and increased to full bright upon detection of motion. Luminaire powers off when target zone is absent of motion activity for ~5 minutes. See coverage diagram for detection cone. Photocell turns off lights when sufficient amount of daylight is detected and turns lights on when additional lighting is required.

