

1218

Electronic Tank Gauge



1218 System Consoles

1218C-0200 AC	System console monitors up to 2 tanks
1218C-0400 AC	System console monitors up to 4 tanks
1218C-0000 AC	Remote secondary console (optional)

1218 Tank Level Sensors

1218S-2500 AS	25' tank level sensor
1218S-2510 AS	25' tank level sensor with drop tube float*
1218S-5000 AS	50' tank level sensor
1218S-5010 AS	50' tank level sensor with drop tube float*

*Please note that a 4" tank opening is required for these models.

1218 Wireless Connectivity options

1218C-0154 2A	Wireless access point
1218C-0164 AK	Long range wireless base station kit
1218C-0163 2C	Wireless client

1218 Accessories

1218C-0169 AG	Cellular Gateway
1218C-6600 AM	External Input/Output Expansion Module
1218C-0171 AS	Outdoor 5-port Ethernet Switch Assembly
1218C-0172 AS	Outdoor 8-port Ethernet Switch Assembly
1218S-2539 CC	1,000' spool Belden 7933A cable
1218S-2543 CC	50' spool Belden 7933A cable
1218S-2544 CC	100' spool Belden 7933A cable
1218S-2545 CC	500' spool Belden 7933A cable

711 Solenoid Valves

711---0200 1V	2" NPT
711---0300 1V	3" NPT
711NC-0200 1V	2" NPT

918 Overfill Alarm Boxes

918S--1100 AA	Single channel tank alarm box
918SB-1000 AA	Single channel tank alarm box with rotating beacon

Remote Strobe

918AC-0156 2L	Remote strobe; 120 Volt AC
---------------	----------------------------

Remote Horn

918AC-0154 AH	Remote horn and box kit; 120 Volt AC
918AC-0157 AHS	Remote horn, box and strobe light kit; 120 Volt AC

918 Clock Gauges

918---0000AGEVR	Clock gauge (FT & IN) w/o alarm; standard float; EVR
918---2000AGEVR	Clock gauge (FT & IN) w/o alarm; DT float; EVR
918C--0000 AG	Clock gauge (gallons or liters) w/o alarm; male threads; standard float
918C--2000 AG	Clock gauge (gallons or liters) w/o alarm; male threads; DT float
918CF-0000 AG	Clock gauge (gallons or liters) w/o alarm; female threads; standard float
918CF-2000 AG	Clock gauge (gallons or liters) w/o alarm; female threads; DT float
918F--0000AGEVR	Clock gauge (FT & IN) w/o alarm; female threads; standard float
918F--2000AGEVR	Clock gauge (FT & IN) w/o alarm; female threads; DT float
918MEF0000AGEVR	Clock gauge (meters & centimeters) w/o alarm; female threads; standard float
918MEF2000AGEVR	Clock gauge (meters & centimeters) w/o alarm; female threads; DT float
918MET0000AGEVR	Clock gauge (meters & centimeters) w/o alarm; male threads; standard float
918MET2000AGEVR	Clock gauge (meters & centimeters) w/o alarm; male threads; DT float
918T--2000 AG	PTFE clock gauge (FT & IN) w/o alarm; male threads; DT float
918FT-0400 AG	PTFE clock gauge (FT & IN) w/o alarm; female threads; DT float

918 Overfill Alarm Boxes

918S--1100 AA	Single channel tank alarm box
918SB-1000 AA	Single channel tank alarm box with rotating beacon
918TCP0400 AS	Sensor assembly (no alarm) (5' probe length)
918TCP0500 AS	Sensor assembly (no alarm) (9½' probe length)

918AC System Interface

918AC-1000 AI	System interface console (1 INPUT, 0 OUTPUTS)
918AC-1100 AI	System interface console (1 INPUT, 1 OUTPUT)
918AC-2000 AI	System interface console (2 INPUTS, 0 OUTPUTS)
918AC-2100 AI	System interface console (2 INPUTS, 1 OUTPUT)
918AC-2200 AI	System interface console (2 INPUTS, 2 OUTPUTS)

*Contact Customer Service for additional 918AC options.

924 Adjustable Level Sensors

924---0600 AS	6" Brass adjustable level sensor
924---1200 AS	12" Brass adjustable level sensor
924---2000 AS	20" Brass adjustable level sensor
924---3000 AS	30" Brass adjustable level sensor
924S--0600 AS	6" Stainless steel adjustable level sensor
924S--1200 AS	12" Stainless steel adjustable level sensor
924S--2000 AS	20" Stainless steel adjustable level sensor
924S--3000 AS	30" Stainless steel adjustable level sensor

924LS Level Sensors

924LS-0150 AS	Level sensor with 15' lead wire
924LS-0250 AS	Level sensor with 25' lead wire
924LS-0600 AS	Level sensor with 60' lead wire

925 Conduit Junction Housing

925---0113 2B	Conduit junction housing (NEMA 4)
925---0114 2B	Conduit junction housing (NEMA 7, Group C & D)

925 Multi-Level Sensors

925---1030 AS	1 float, brass; stem length 3¾" to 36"
925---1060 AS	1 float; brass; stem length greater than 36" to 72"
925---1090 AS	1 float; brass; stem length greater than 72" to 108"
925---1120 AS	1 float; brass; stem length greater than 108" to 144"
925---2030 AS	2 floats; brass; stem length 3¾" to 36"
925---2060 AS	2 floats; brass; stem length greater than 36" to 72"
925---2090 AS	2 floats; brass; stem length greater than 72" to 108"
925---2120 AS	2 floats; brass; stem length greater than 108" to 144"
925S--1030 AS	1 float; SS; stem length 3¾" to 36"
925S--1060 AS	1 float; SS; stem length greater than 36" to 72"
925S--1090 AS	1 float; SS; stem length greater than 72" to 108"
925S--1120 AS	1 float; SS; stem length greater than 108" to 144"
925S--2030 AS	2 floats; SS; stem length 3¾" to 36"
925S--2060 AS	2 floats; SS; stem length greater than 36" to 72"
925S--2090 AS	2 floats; SS; stem length greater than 72" to 108"
925S--2120 AS	2 floats; SS; stem length greater than 108" to 144"


MORRISON BROS. CO.

570 E. 7th Street, P.O. Box 238 | Dubuque, IA 52004-0238
 t. 563.583.5701 | 800.553.4840 | f. 563.583.5028
 custserv@morbros.com | www.morbros.com


March 2020



At the network connection...



At the tank...

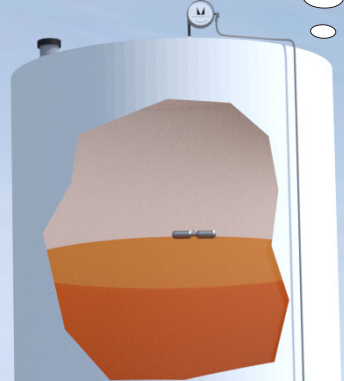

At the console...

