



DISPENSERS



FUEL KITS



PUMPS



METERS



NOZZLE



FILTRATION

CUBE

FEATURES

- **STURDY STRUCTURE**
- **MECHANICAL METER**
- **THERMAL-PROTECTED MOTOR**
- **OVERLOAD PROTECTION**
- **BUILT-IN MESH FILTER**
- **IP55 PROTECTION RATING**

The PIUSI CUBE is a range of mechanical fuel transfer dispensers for non-commercial use, composed of a self-priming vane pump fitted with integrated bypass valve, automatic nozzle with swivel connection and integrated nozzle holder with start/stop pump lever. Its versatility allows for several installations: on walls, on tanks, on cisterns, on drums or stand-alone (with the optional pedestal).

PERFORMANCE

UP TO

15 GPM

FLOW RATE

AC/DC

VOLTAGE

POWER

± 1%

ACCURACY




CUBE WITH FILTER



CUBE WITH PEDESTAL (optional)

PACKAGING

PART #	WEIGHT		PACKAGING			N. BOXES / EUROPALET	
	KG	LBS	MM	INCH	PCS/BOX	✕	
FO057900B	22	48.5	381X381X482	15X15X19	1	12	24
FO057603A	22	48.5	381X381X482	15X15X19	1	12	24



FLUID
MONITORING



AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

CHART

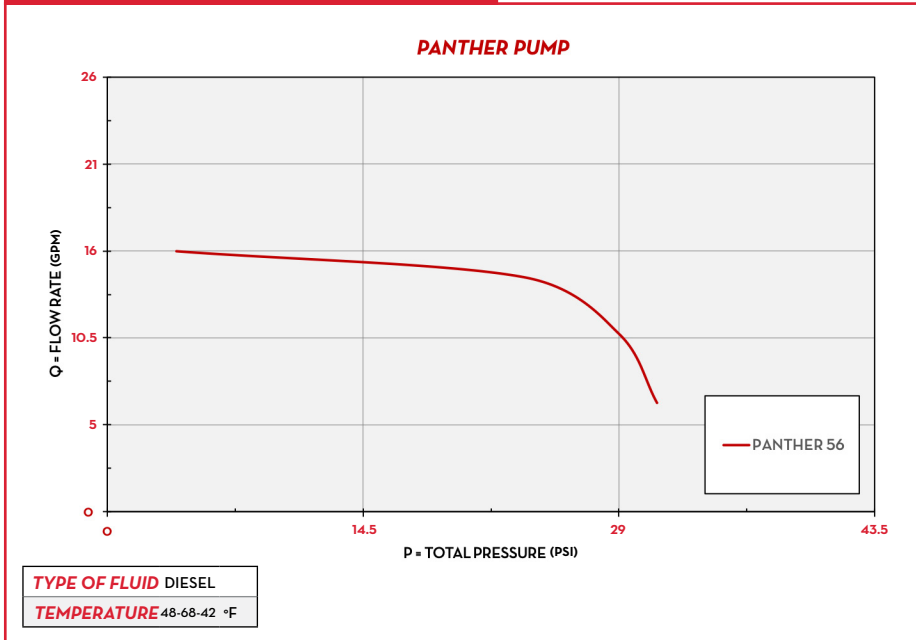


IN THE BOX

- CUBE DISPENSER
- AUTOMATIC NOZZLE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS



DIMENSIONS

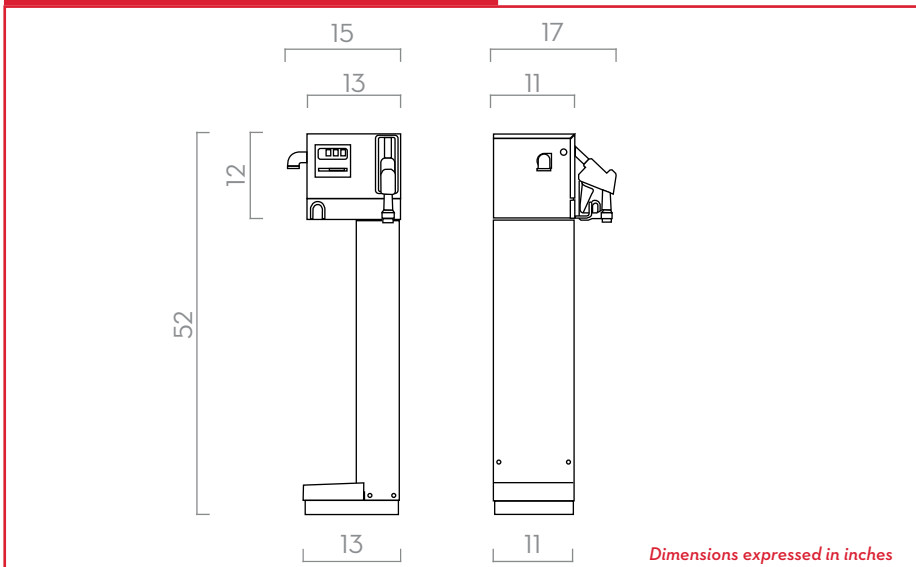

COMPONENTS

- **PUMP:**
PANTHER 56 PG. 44
- **METER:**
K33 PG. 60
- **NOZZLE:**
A60 AUTOMATIC NOZZLE PG. 86

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	METER	NOZZLE	FILTER		INLET	HOSE	
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.				H2O FILTER	FILTERING CAPACITY		NPT	LENGTH
FO057900B	CUBE 56 120V/60HZ (GALLON/NPT)	D	56	15	120/60	650	7.5	PANTH 56	K33	AUTO	OPTIONAL	-	1"	13 FT	3/4"
FO057603A	CUBE 56 12V (GALLON/NPT)	D	56	15	12V DC	300	35	PANTH 56	K33	AUTO	OPTIONAL	-	1"	13 FT	3/4"