



LUBE KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES



FILTRATION

GREASE HOSE REEL

FEATURES

- HEAVY DUTY SPRING
- LONG LASTING STEEL HUB
- HIGH PRESSURE

The Piusi CLOSED HOSE REEL for grease, manufactured according to the most demanding requirements, is suitable for all grease heavy duty applications. Its heavy-duty cabinet prevents any possible damage to the inner components and makes this reel durable.

PERFORMANCE

max

5801 PSI

MAX WORKING PRESSURE

40 FT

HOSE LENGTH



HOSE REEL CLOSED FOR GREASE



PACKAGING

PART #	WEIGHT		PACKAGING			N.BOXES/ EUROPALLET	
	KG	LBS	IN	PCS/PALLET	PCS/BOX		
HC401238NO	20	44	21.6X7.9X21.2	-	1	12	20



FLUID MONITORING



HOSE REELS



AIR



ANTIFREEZE



DEF



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER




WINDSCREEN


INSTALLATION

Multiple ways to install PIUSI's hose reels: they can be easily placed wherever you need them without any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any condition.


ROOF
INSTALLATION



WALL
INSTALLATION



GROUND
INSTALLATION



IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL

DETAILS



4 ROLLS HOSE GUIDE



FIX SUPPORT PLATE




SWIVEL

DIMENSIONS

MODEL CLOSE
HOSE REEL

MODEL	CLOSE HOSE REEL
A	20.3
B	10.2
C	19.3
D	11.6
E	4.8
F	3.5
G	10.6
H	0.4
I	6.3

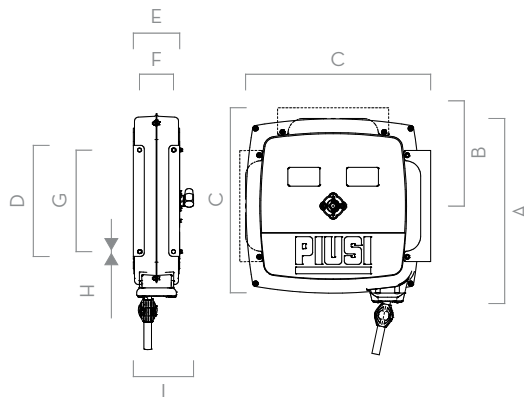

Measures expressed in inches

MATERIALS

- BODY: CAST IRON
- HUB: SYNTHETED STEEL
- TUBE: RUBBER

TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	HOSE	MAX WORKING PRESSURE	PRESSURE DROP	INLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGTH BOUND	HOSE LENGTH
			NPT/BSP	PSI	PSI	NPT/BSP	NPT/BSP	FT	FT
HC401238NO	CLOSED HOSE REEL GREASE 3/8" X 40FT		3/8"	5801	-	3/8" FEMALE	3/8" FEMALE	40	-

(*) PRESSURE DROP FOR GREASE NLGI 2.5

GREASE HOSE REEL

CLOSED

117