
## **Operating Instructions**

## **Static Discharge Reel**

Model Number:

**GA3100 N** 

## **Dimensions**

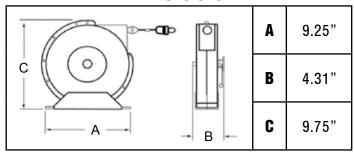



## **WARNING!**

Grounding plugs / clamps shall not be allowed to drag across ramp.

Clamps / plugs shall be carried to reels on equipment.

Replace cable with 100' maximum 3/32" x 5/32" grounding cable, with maximum coating OD of 1/8". Pre-wind the reel 54 to 55 full turns clockwise. Attach cable and allow it to slowly retract into the reel.

Do not operate this product without the appropriate pre-wind on the reel. Over pre-winding or under pre-winding of the reel may damage the power spring.

Failure to follow the above warnings may cause personal injury and damage to the reel.

REELCRAFT