


Underground Storage Tank Equipment

Advantages

- Prevents vapor leaks from loosening on 4" riser during tank fills.
- Adds approximately 4" to riser height to fit under most existing fill and vapor manway covers.
- Swivels on two rows of corrosion-resistant chromium steel ball bearings for long life in high volume stations.
- All vapor seals are fluorocarbon and inert in motor fuels.
- Stainless steel models provide additional durability while also making the site future fuels ready and are CARB Stage I EVR approved under executive order VR-101.

SWF-100 Top Seal Swivel Fill Pipe Adapter

The top seal swivel fill pipe adapter helps prevent leaks caused by constant fill delivery elbow movement on the fill adapter. The top section rotates during normal deliveries, preventing the bottom section from loosening on the fill riser pipe, causing a vapor leak around the adapter. The top seal swivel fill adapter fits all 4" top seal delivery elbows.

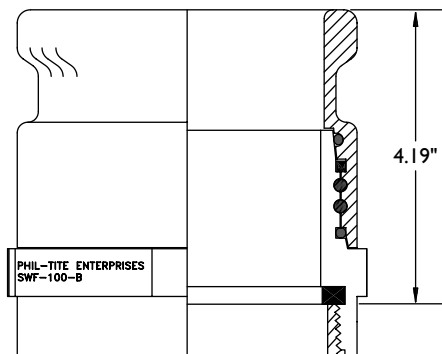

| Model | Thread | Weight | |
|--------------|--|--------|------|
| | | Lbs. | Kg |
| SWF-100-SS** | NPT | 7.00 | 3.18 |
| SWF-100-B* | NPT | 7.00 | 3.18 |
| Model | Description | | |
| SWFV-PKGSS** | Includes one SWF-100-SS and one SVVV-101-SS swivel adapter | | |
| SWFV-PKG* | Includes one SWF-100-B* and one SVVV-101-B* swivel adapter | | |
| 85039 | Replacement gasket for all swivel adapter models. | | |

*EVR Phase I Certification VR-101 and VR-103 and Missouri MOPETP APCP-0002-001-99.

**EVR Phase I Certification VR-101 for gas and E85.



Franklin Fueling Systems

www.franklinfueling.com
 3760 Marsh Road • Madison, WI 53718, USA
 Tel: +1 608 838 8786 • Fax: +1 608 838 6433
 Tel: USA & Canada 1 800 225 9787 • Tel: Mexico 001 800 738 7610
 FFS-0144 08-10

