



DISPENSERS



FUEL KITS



PUMPS



METERS



NOZZLES



FILTRATION

# A60 / A120

## FEATURES

- AUTOMATIC
- READY TO USE
- STURDY DESIGN

Among the range of nozzles for fuel dispensing, PIUSI FUEL NOZZLES consist of a range of automatic devices for flow rates up to 32 GPM fitted with an inner device that automatically stops the fluid dispensing when the tank is full. These nozzles also include a swivel connector.

## PERFORMANCE

UP TO

**32 GPM**

FLOW RATE

**1" NPT**

INLET

**3/4"**

SPOUT OD Ø

A60

**1"**

SPOUT OD Ø

A120



A60



A120



## PACKAGING

PART #	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚚
FO0603470	1.20	2.65	36OX36OX280	14X14X11	1	-	-
FO0610160	1.93	4.25	36OX36OX280	14X14X11	1	-	-




FLUID MONITORING

- A  
AIR
- A  
ANTIFREEZE
- D  
DEF
- B  
BIODIESEL
- D  
DIESEL
- F  
FOOD
- G  
GASOLINE
- G  
GREASE
- K  
KEROSENE
- O  
OIL
- W  
WATER
- W  
WINDSCREEN

## CHART

### A60 - A120

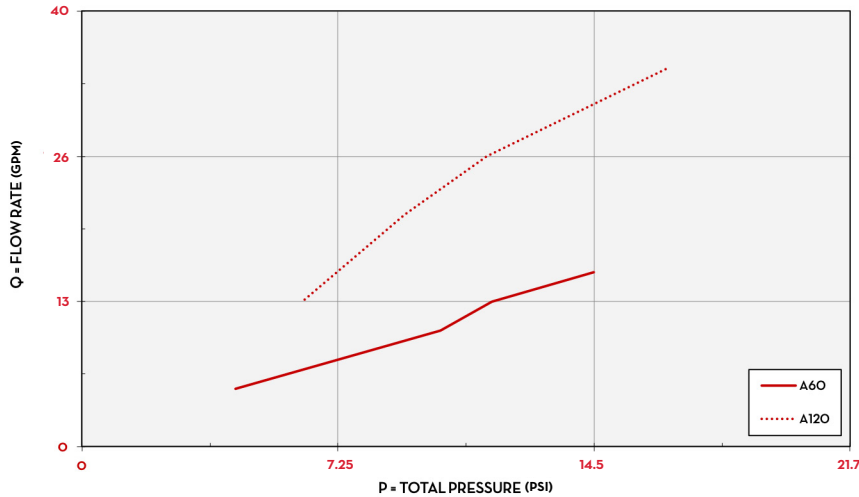

**TYPE OF FLUID** DIESEL  
**TEMPERATURE** 68-77-50 °F

## IN THE BOX

- A60/A120 NOZZLE
- INSTRUCTION MANUAL

## DETAILS




AUTOMATIC STOP



F 1" SWIVEL

## DIMENSIONS

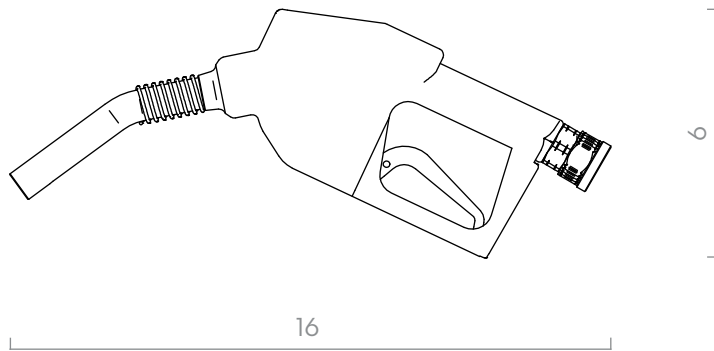

Dimensions expressed in inches

## MATERIALS

- BODY: ALUMINUM
- SEAL: VITON

## TECHNICAL DATA

PART #	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET		SPOUT
			L/MIN	GPM	WITHOUT SWIVEL NPT	WITH SWIVEL NPT	EXT. Ø IN
FO0603470	A60 AUTO FUEL NOZZLE 1"NPT-F 3/4" SPOUT	D	72	19	F 3/4"	F 1"	3/4"
FO0610160	A120 AUTO FUEL NOZZLE 1"NPT-F 1" SPOUT	D	120	32	F 1"	F 1"	1"

# A60 / A120